

In series


The model is in series and available for the long term.



Specification

Sensor

Sensor type	CMOS Mono
Shutter	Global Shutter
Sensor characteristic	Linear
Readout mode	Progressive scan
Pixel Class	5 MP
Resolution	5.01 Mpix
Resolution (h x v)	2448 x 2048 Pixel
Aspect ratio	5:4
ADC	12 bit
Color depth (camera)	8 bit
Optical sensor class	2/3"
Optical Size	8.446 mm x 7.066 mm
Optical sensor diagonal	11.01 mm (1/1.45")
Pixel size	3.45 µm
Micro lens shift	0.00
Manufacturer	Sony
Sensor Model	IMX264LLR-C
Gain (master/RGB)	24x/4x
AOI horizontal	-
AOI vertical	-
AOI image width / step width	- / -
AOI image height / step width	- / -
AOI position grid (horizontal/vertical)	- / -
Binning horizontal	-
Binning vertical	-
Binning method	-
Binning factor	-
Subsampling horizontal	-
Subsampling vertical	-
Subsampling method	-
Subsampling factor	-

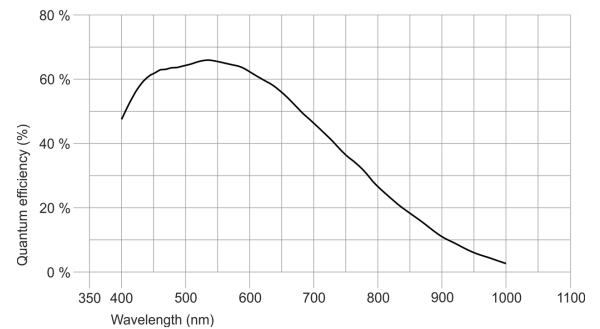

Model

Frame rate freerun mode (in 8-bit mode)	12 fps
Frame rate trigger (continuous)	14 fps
Frame rate trigger (maximum)	14 fps
Exposure time (minimum - maximum)	0.032 ms - 2000 ms
Power consumption	5.6 W - 9.8 W
Image memory	128 MB

The maximum frame rate depends on the CPU load and the available image memory. Applications and processes, including vision apps, that access the CPU and image memory can reduce the maximum achievable frame rate.

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Device temperature during operation	0 °C - 55 °C / 32 °F - 131 °F
Device temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

Connectors

Interface connector	GigE RJ45, screwable
I/O connector	12-pin M12 connector (Attend 216A-12MSR)
Power supply	12 V - 24 V or PoE

Pin assignment I/O connector

1	Power supply 12-24 V DC (VBUS)
2	Reference level (ground) for power supply and RS-232 (VBUS GND)
3	Trigger input with optocoupler (Opto IN 0)
4	Input 1 with optocoupler (Opto IN 1)
5	Common reference level for all Opto IN (Opto IN COM)
6	Common reference level for all Opto OUT (Opto OUT COM)
7	Output 1 with optocoupler (Opto OUT 1)
8	Output 2 with optocoupler (Opto OUT 2)
9	Serial interface (RS232 Rx/D)
10	Serial interface (RS232 Tx/D)
11	Input 2 with optocoupler (Opto IN 2)
12	Flash output with optocoupler (Opto OUT 0)



Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	34.0 mm x 44.0 mm x 73.0 mm
Mass	168 g



VISION CONSULTANCY
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from
www.machine-vision-shop.com

If you have any questions, you need help composing the
right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptvoets



VISION CONSULTANCY

Robert Schumandomein 2
6229 ES Maastricht
The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl
www.machine-vision-shop.com

Scan me to visit
[machine-vision-shop](http://machine-vision-shop.com)

