

In series

The model is in series and available for the long term.




uEye industrial cameras now also work with IDS peak! We recommend the Software Development Kit for the implementation of new projects. [Learn about the process here and switch now.](#) Please note: The technical data given here was measured using the IDS Software Suite.

Specification

Sensor

| | |
|---|------------------------|
| Sensor type | CMOS Color |
| Shutter | Global Shutter |
| Sensor characteristic | Linear |
| Readout mode | Progressive scan |
| Pixel Class | 12 MP |
| Resolution | 12.34 Mpix |
| Resolution (h x v) | 4104 x 3006 Pixel |
| Aspect ratio | 4:3 |
| ADC | 12 bit |
| Color depth (camera) | 12 bit |
| Optical sensor class | 1.1" |
| Optical Size | 14.158 mm x 10.370 mm) |
| Optical sensor diagonal | 17.55 mm |
| Pixel size | 3.45 µm |
| Manufacturer | Sony |
| Sensor Model | IMX304LQR-C |
| Gain (master/RGB) | 24x/4x |
| AOI horizontal | same frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 256 / 8 |
| AOI image height / step width | 2 / 2 |
| AOI position grid (horizontal/vertical) | 4 / 2 |
| Binning horizontal | - |
| Binning vertical | - |
| Binning method | - |
| Binning factor | - |
| Subsampling horizontal | same frame rate |
| Subsampling vertical | increased frame rate |
| Subsampling method | M/C automatic |
| Subsampling factor | 2, 4, 6, 8, 16 |

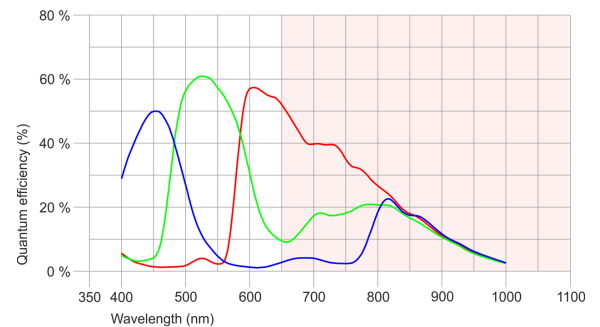

Subject to technical modifications (2023-06-23)

Model

| | |
|---|---|
| Pixel clock range | 99 MHz - 140 MHz |
| Frame rate freerun mode (in 8-bit mode) | 8.6 fps |
| Frame rate trigger (continuous) | 8.6 fps |
| Frame rate trigger (maximum) | 9.0 fps |
| Exposure time (minimum - maximum) | 0.047 ms - 1000 ms |
| Long exposure (maximum) | 30000 ms |
| Power consumption | 1.3 W - 3.9 W |
| Image memory | 128 MB |
| Special features | IDS line scan mode Overlap trigger Sensor source gain |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


| | |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Device temperature during storage | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 % |

Connectors

| | |
|---------------------|---|
| Interface connector | GigE RJ45, screwable |
| I/O connector | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply | 12 V - 24 V or PoE |

Pin assignment I/O connector

| | |
|---|-------------------------------------|
| 1 | Ground (GND) |
| 2 | Flash output with optocoupler (-) |
| 3 | General Purpose I/O (GPIO) 1 |
| 4 | Trigger input with optocoupler (-) |
| 5 | Flash output with optocoupler (+) |
| 6 | General Purpose I/O (GPIO) 2 |
| 7 | Trigger input with optocoupler (+) |
| 8 | Input power supply (VCC) 12-24 V DC |



Design

| | |
|------------------|-----------------------------|
| Lens Mount | C-Mount |
| IP code | IP30 |
| Dimensions H/W/L | 34.0 mm x 44.0 mm x 47.0 mm |
| Mass | 107 g |



VISION CONSULTANCY
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from
www.machine-vision-shop.com

If you have any questions, you need help composing the
right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptvoets



VISION CONSULTANCY

Robert Schumandomein 2
6229 ES Maastricht
The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl
www.machine-vision-shop.com

Scan me to visit
[machine-vision-shop](http://machine-vision-shop.com)

