
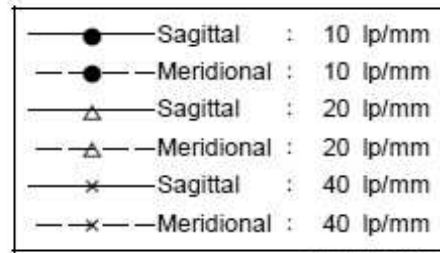



● Modulation Transfer Function (MTF)

W. D. = 250mm

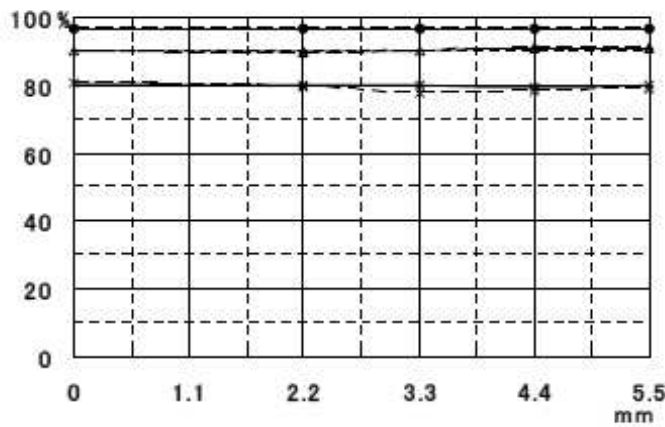


4D-0264T0075


● Distortion (歪曲収差)

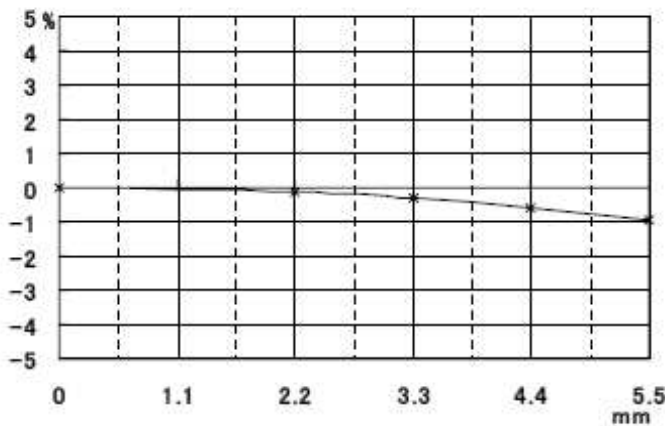

● Vignetting (周辺光量)

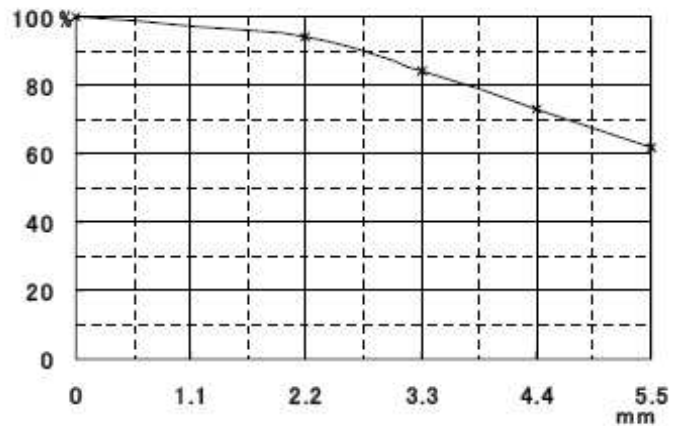

● Spectral Transmittance (分光透過率)

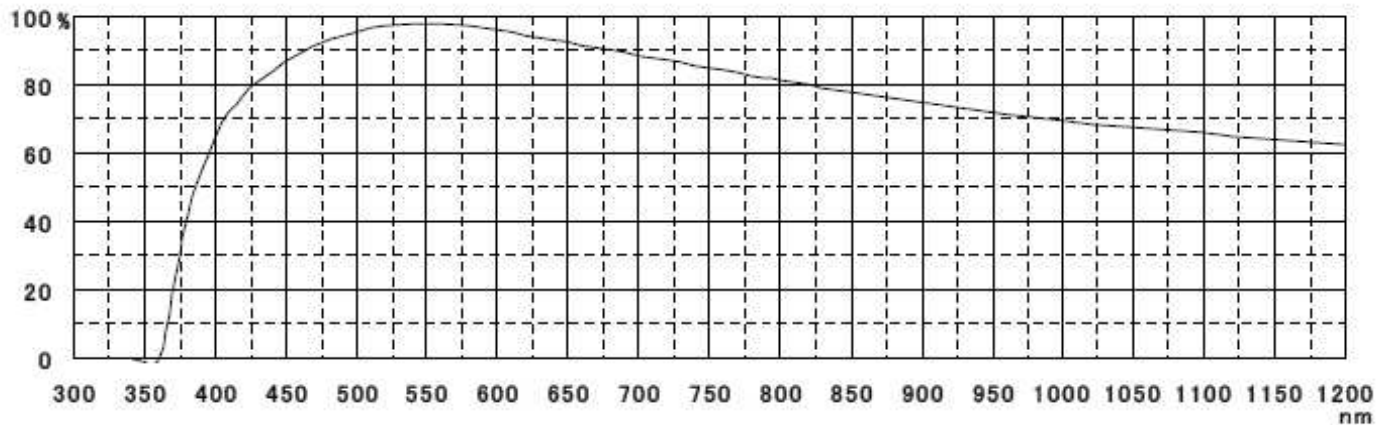

● Resolving Power (解像力)

y	0	3.3	4.4	5.5	
Rr(S)	200	200	160	125	
Rt(M)		200	200	160	

● Entrance Pupil Position (入射瞳位置) -11.28 [mm] \*

● Exit Pupil Position (射出瞳位置) -34.29 [mm] \*

● 1st Principal Point (第一主点) -10.95 [mm] \*

● 2nd Principal Point (第二主点) -33.95 [mm] \*

(\* : From Image Plane)

SPEC. INFO	FL-CC3516-2M	L0CR84-S002-B13
		May. 25. 2018

1. Model FL-CC3516-2M
2. Application For 2/3 Format Camera

3. Specification

3-1. Physical (As per the attached drawing)

- (1) Dimensions  $\phi$  29.5 mm  $\times$  35.4 mm
- (2) Weight 64 g
- (3) Mount C-Mount (1 – 32 UN – 2A)
- (4) Filter Screw Size  $\phi$  27 mm , P = 0.5 mm

3-2. Optical

- (1) Focal Length 35 mm  $\pm$  5%
- (2) Max. Aperture Ratio 1: 1.6
- (3) Iris Range F / 1.6 to F / 16
- (4) Angle of View  
 Diagonal 18.39°  
 Horizontal 14.76°  
 Vertical 11.10°
- (5) Picture format 8.8 mm  $\times$  6.6 mm
- (6) Focusing Range Inf. to 0.4 m
- (7) Back Focal Length 11.85 mm (in air)
- (8) Flange Back Length 17.526 mm  $\pm$  0.05 mm (in air)

3-3. Mechanical

- (1) Focusing Mechanism Straight Helicoid  
 Rotation Angle 148.2°  
 Rotation Torque 0.2N·cm to 7.0 N·cm  
 Focus Ring can be fixed at any positions by 3 fixing screws (A) or 1 thumb screw (refer to external view)
- (2) Iris Mechanism Non-click, Close-down  
 Rotation Angle 92.4°  
 Rotation Torque 0.5N·cm to 7.0 N·cm  
 Iris Ring can be fixed at any positions by 3 fixing screws (B) or 1 thumb screw (refer to external view)

3-4. Vibration & Shock Test Standard

(1) Vibration Conditions

Wave	Sine Wave
Acceleration	1.96 m/s <sup>2</sup> to 59.78 m/s <sup>2</sup>
Cycle Range	10 Hz to 55 Hz
Cycle Period	3 Minutes
Duration of Vibration	120 Minutes Respectively in Three Dimensional Directions

(2) Shock Conditions




Tester	Shock Testing Machine by Dropping
Impact Force	588 m/s <sup>2</sup>
Duration of Shock	3.5 ms
Directions & Number of Times	1 Time Respectively in Three Dimensional Directions

<b>SPEC. INFO</b>	<b>FL-CC3516-2M</b>	L0CR84-S002-B23
		May. 25. 2018

3-5. Environmental Temperature Range       $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$

4. Accessories

- |                                   |          |                      |
|-----------------------------------|----------|----------------------|
| (1) Front Lens Cap                | 1 piece  |                      |
| (2) Rear Lens Cap                 | 1 piece  |                      |
| (3) Fixing Screw ① for Focus Ring | 3 pieces |                      |
| (4) Fixing Screw ② for Iris Ring  | 3 pieces |                      |
| (5) Thumbscrew for Focus Ring     | 1 pieces | (for Optional Usage) |
| (6) Thumbscrew for Iris Ring      | 1 pieces | (for Optional Usage) |
| (7) Packing Box                   | 1 piece  |                      |

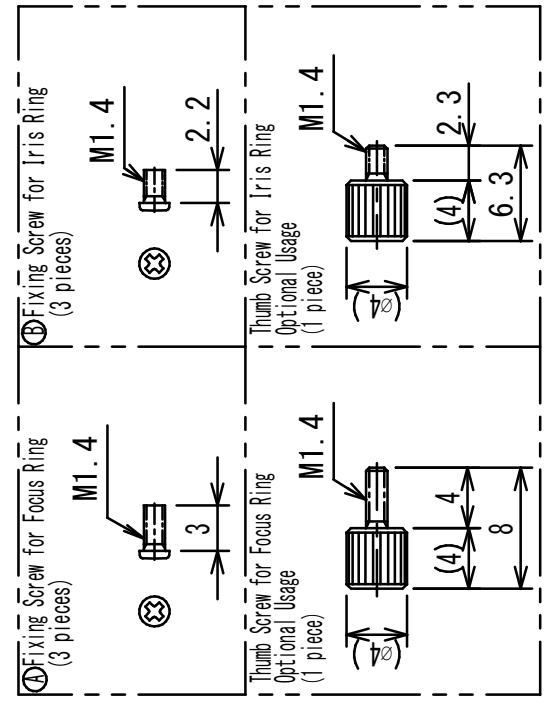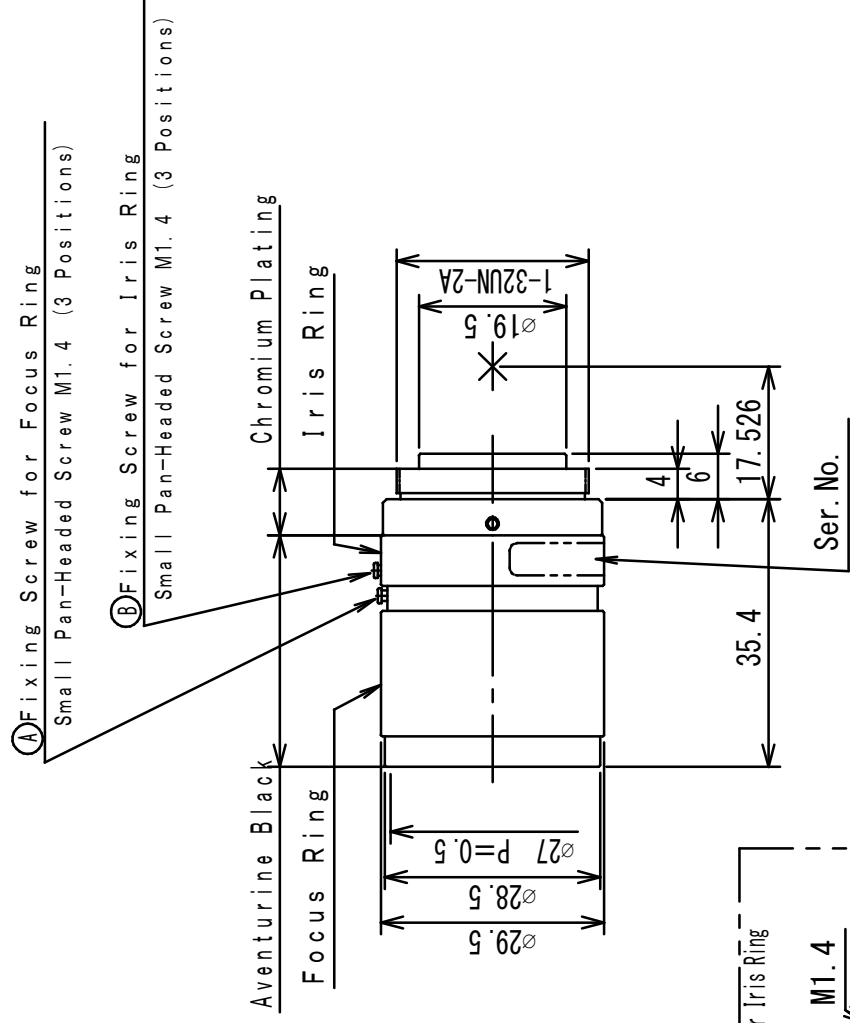



**VISION CONSULTANCY**  
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from  
[www.machine-vision-shop.com](http://www.machine-vision-shop.com)

If you have any questions, you need help composing the  
right package for your application or do you want to order?

Feel free to contact us via e-mail at [sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl) or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptvoets



**VISION CONSULTANCY**

Robert Schumandomein 2  
6229 ES Maastricht  
The Netherlands

+31 (0) 438 522 651

[sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl)  
[www.machine-vision-shop.com](http://www.machine-vision-shop.com)

Scan me to visit  
[machine-vision-shop](http://machine-vision-shop.com)

