


## Lighting Dimension

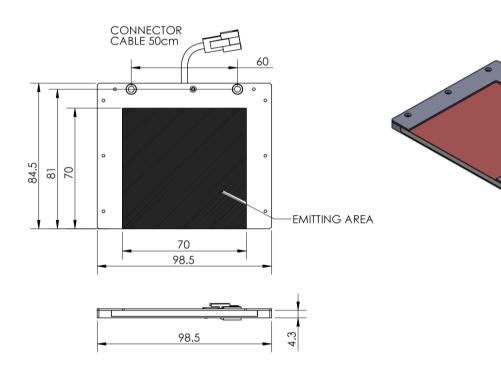

ROHS CE

| Mechanical Information    |                                |
|---------------------------|--------------------------------|
| Casing Material           | Aluminium                      |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight                    | 90 g                           |
| Length / Outer Diameter   | 98.5 mm                        |
| Width / Inner Diameter    | 84.5 mm                        |
| Thickness / Height        | 5.3 mm                         |

**ILLUMINATOR DATA-ID** 

## BHDS-00-070-1-B-24V

TMS

| Optical Information   |        |   |   |             |  |  |
|---|--------|---|---|-------------|--|--|
| Part Number   |        |   | BHDS-00-070-1-B-24V                           |             |  |  |
| LED Color   |        |   | BLUE  |             |  |  |
| Wavelength  | (nm)   | 460   |   |             |  |  |
| Intensity (±15%)  | (Lux)  | 5720  | 5520  | 4970        |  |  |
| Working Distance  | (mm)   | 5   | 10  | 15          |  |  |
| Illumination (number of row)                                    |        |   | 1   |             |  |  |
| Illumination Active Area  |        |   |   |             |  |  |
| Active Length / Outer Diameter                                  | (mm)   | 70  |   |             |  |  |
| Active Width / Inner Diameter                                   | (mm)   | 70  |   |             |  |  |
| Emission angle  | (deg.) | 0   |   |             |  |  |
| Eye Safety Class ( IEC62471 )                                   |        | И   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
| Electrical Information  |        |   |   |             |  |  |
| Lighting Supply Voltage   |        |   |   |             |  |  |
| (constant voltage mode)   |        |   | 24V ± 2%                                      |             |  |  |
| Continuous Current  | (mA)   | 90  |   |             |  |  |
| Power Consumption   | (W)    | 2.16  |   |             |  |  |
| Lighting casing temperature,                                    |        |   |   |             |  |  |
| Operating after 60 minutes                                      | °C     | 46.7  |   |             |  |  |
|   |        |   |   |             |  |  |
| Strobe Mode Specification                                       |        |   |   |             |  |  |
| Pulse Operation   |        | YES   |   |             |  |  |
| Max. Lighting Supply Voltage                                    |        | 165   |   |             |  |  |
| (Constant voltage power supply)                                 | (∨)    | Pulsing at 24   | VDC to 48VDC, 0-10% Duty Cycle, Recommended a | at 36VDC    |  |  |
|   |        |   |   |             |  |  |
| Pulse Current, (Max. 10msec)<br>(Constant current power supply) | (mA)   | 270   |   |             |  |  |
|   | (mass) |   |   |             |  |  |
| Max. Trigger Pulse Duration<br>Duty Cycle                       | (msec) | (msec) 10   |   |             |  |  |
|   |        | 0-10%   |   |             |  |  |
|   |        |   |   |             |  |  |
| Additional Information  |        |   |   |             |  |  |
| Additional Cooling Method                                       |        | Attached to machine part for better heat dissipation        |   |             |  |  |
| Intensity Controller Selection                                  |        | ANG, ST, SD and SDA Series                                  |   |             |  |  |
| CE Conformity   |        | YES   |   |             |  |  |
| RoHS Compliance   |        | YES   |   |             |  |  |
|   |        |   |   |             |  |  |
| Connection  |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
| Connector Type (Default):                                       |        | JST SMR-03V   |   |             |  |  |
| Cable Length out from lighting :                                | (mm)   | Di-   | 500   | Cable Calar |  |  |
| Pin Configuration :   |        | Pin   | Signal  | Cable Color |  |  |
|   |        | 2   | LED +<br>N.C.                                 | RED         |  |  |
|   |        | 3   | N.C.<br>LED -                                 | WHITE       |  |  |
|   |        | 3   | LED-  | WHILE       |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
|   |        |   |   |             |  |  |
| Application   |        |   |   |             |  |  |
| Application   |        | Destificies III anti-attac                                  |   |             |  |  |
| Illumination Type   |        | Backlight Illumination                                      |   |             |  |  |
| Applicattion Use  |        | Lead frame inspection, shape recognition, size measurement. |   |             |  |  |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

