


Lighting Dimension

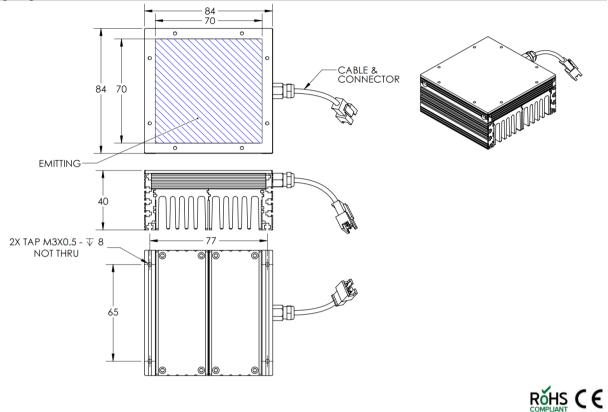

| Mechanical Information | |
|---------------------------|--------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight | 380 g |
| Length / Outer Diameter | 84 mm |
| Width / Inner Diameter | 84 mm |
| Thickness / Height | 40 mm |

ILLUMINATOR DATA-ID

BHH-00-070-X-G-24V

| Optical Information | | | | | | |
|--|-------------|---|---|-------------|--|--|
| Part Number | | BHH-00-070-X-G-24V | | | | |
| LED Color | | GREEN | | | | |
| Wavelength | (nm) | | 525 | | | |
| Intensity (±15%) | (Lux) | 130072 | 98690 | 76112 | | |
| Working Distance | (mm) | 10 | 20 | 30 | | |
| Illumination (number of row) | | | Х | | | |
| Illumination Active Area | | | | | | |
| Active Length / Outer Diameter | (mm) | 70 | | | | |
| Active Width / Inner Diameter | (mm) | 70 | | | | |
| Emission angle | (deg.) | 0 | | | | |
| Eye Safety Class (IEC62471) | | | EXEMPT | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage | | | | | | |
| Lighting Supply Voltage (constant voltage mode) | | | 24V ± 2% | | | |
| Continuous Current | (mA) | 24V ± 2% 600 | | | | |
| Power Consumption | (MA) (W) | 14.4 | | | | |
| Lighting casing temperature, | (**) | 14.4 | | | | |
| Operating after 60 minutes | °c | 71.5 | | | | |
| | | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | | YES | | | |
| | | | YES | | | |
| Max. Lighting Supply Voltage | (∨) | Pulsing at | 24VDC to 48VDC, 0-10% Duty Cycle, Recommended | l at 36VDC | | |
| (Constant voltage power supply) | | | | | | |
| Pulse Current, (Max. 10msec) | (mA) | 1800 | | | | |
| (Constant current power supply) | | | | | | |
| Max. Trigger Pulse Duration | (msec) | | | | | |
| Duty Cycle | | 0-10% | | | | |
| | | | | | | |
| Additional Information | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANG, ST, SD and SDA Series | | | | |
| CE Conformity | | YES | | | | |
| RoHS Compliance | | YES | | | | |
| | | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | |
| Cable Length out from lighting : | (mm) | | 500 | | | |
| Pin Configuration : | | Pin | Signal | Cable Color | | |
| | | 1 | LED + | RED | | |
| | | 2 | N.C. | | | |
| | | 3 | LED - | WHITE | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Application | | | | | | |
| Illumination Type | | Backlight Illumination | | | | |
| Applicattion Use | | Lead frame inspection, shape recognition, size measurement. | | | | |
| | | Leau name inspection, snape fetoginuon, size measurement. | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

