


BHLQ-00-400X400-X-B-24V

Lighting Dimension



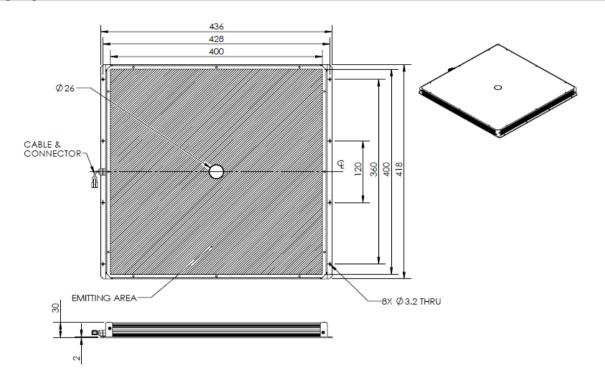

| Mechanical Information | |
|---------------------------|------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% |
| Weight | 2650 g |
| Length / Outer Diameter | 436 mm X 418 mm |
| Width / Inner Diameter | 26 mm |
| Thickness / Height | 30 mm |



BHLQ-00-400X400-X-B-24V

| Optical Information | | | | | | |
|----------------------------------|-----------------------|--|----------|-------------|--|--|
| Part Number | | BHLQ-00-400X400-X-B-24V | | | | |
| LED Color | | BLUE | | | | |
| Wavelength | (nm) | | 470 | | | |
| Intensity (±15%) | (Lux) | 29252 27832 26696 | | | | |
| Working Distance | (mm) | 70 | 85 | 100 | | |
| Illumination (number of row) | (, | • | X | | | |
| Illumination Active Area | | | | | | |
| Active Length / Outer Diameter | (mm) | n) 400 | | | | |
| Active Width / Inner Diameter | (mm) | 26 | | | | |
| Emission angle | (deg.) | 0 | | | | |
| Eye Safety Class (IEC62471) | (ucg./ | eg.) U | | | | |
| | | | | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage | | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | | |
| Continuous Current | (mA) | 4485 | | | | |
| Power Consumption | (W) | 107.64 | | | | |
| Lighting casing temperature, | (**/ | 107.04 | | | | |
| Operating after 60 minutes | °C | C 76.1 | | | | |
| operating after 60 minutes | 70:1 | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | YES | | | | |
| Max. Lighting Supply Voltage | | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle | | | | |
| (Constant voltage power supply) | (V) | Recommended at 36VDC | | | | |
| Pulse Current, (Max. 10msec) | | | | | | |
| (Constant current power supply) | (mA) | nA) 13455 | | | | |
| Max. Trigger Pulse Duration | () | 10 | | | | |
| Duty Cycle | (msec) | (msec) 10 0-10% | | | | |
| out the | 0-10% | | | | | |
| Additional Information | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANGX, ST and SD Series | | | | |
| CE Conformity | | YES | | | | |
| RoHS Compliance | YES | | | | | |
| | | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | |
| Cable Length out from lighting : | (mm) | 500 | | | | |
| Pin Configuration : | | Pin | Signal | Cable Color | | |
| | | 1 | LED + | RED | | |
| | | 2 | N.C. | | | |
| | | 3 | LED - | WHITE | | |
| | | | <u> </u> | | | |
| | | | | | | |
| | | | | | | |
| Application | | | | | | |
| Illumination Type | Diffused Illumination | | | | | |
| Applicattion Use | | Robotic picking, identification & missing part, measurement, shape recognition | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

