


BHS4-00-050-X-B-24V

Lighting Dimension



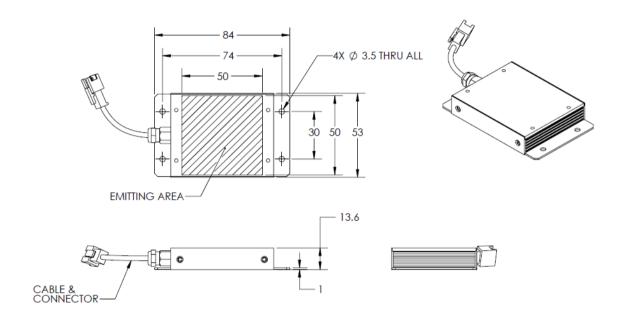

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	80 g
Length / Outer Diameter	84 mm
Width / Inner Diameter	53 mm
Thickness / Height	13.6 mm



BHS4-00-050-X-B-24V

Optical Information								
Part Number			BHS4-00-050-X-B-24V					
LED Color		BLUE						
Wavelength	(nm)	450						
Intensity (±15%)	(Lux)	TBA TBA TBA						
Working Distance	(mm)	10	20	30				
Illumination (number of row)	(11111)	10	X	30				
Illumination Active Area	_		Λ					
Active Length / Outer Diameter	(mm)	50						
			50					
Active Width / Inner Diameter	(mm)	0						
Emission angle	(deg.)	(deg.)						
Eye Safety Class (IEC62471)		_	II					
Electrical Information								
Lighting Supply Voltage								
(constant voltage mode)		24V ± 2%						
Continuous Current	(mA)	72						
Power Consumption	(MA) (W)							
Lighting casing temperature,	(44)	1.728						
Operating after 60 minutes	°C		53.6					
Operating after 60 minutes	C		53.0					
Strobe Mode Specification								
Pulse Operation			YES					
Max. Lighting Supply Voltage			Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle					
(Constant voltage power supply)	(V)		Recommended at 36VDC					
			Recommended at SOVIC					
Pulse Current, (Max. 10msec)	(mA)		216					
(Constant current power supply)								
Max. Trigger Pulse Duration	(msec)		10					
Duty Cycle			0-10%					
Additional Information								
Additional Cooling Method	1	Λ+	tached to machine part for better heat dissipation					
Intensity Controller Selection		At	ANG, ST, SD and SDA Series					
CE Conformity								
RoHS Compliance		YES						
NOTIS COMPITATICE								
1			YES					
Connection								
Connection			YES					
Connector Type (Default):			YES JST SMR-03V					
Connector Type (Default): Cable Length out from lighting :	(mm)		YES JST SMR-03V 500					
Connector Type (Default):	(mm)	Pin	YES JST SMR-03V 500 Signal	Cable Color				
Connector Type (Default): Cable Length out from lighting :	(mm)	1	YES JST SMR-03V 500 Signal LED+	RED				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1	YES JST SMR-03V 500 Signal LED+	RED				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connector Type (Default): Cable Length out from lighting : Pin Configuration : Application	(mm)	1 2	JST SMR-03V 500 Signal LED + N.C. LED -	RED 				
Connector Type (Default): Cable Length out from lighting : Pin Configuration :	(mm)	1 2 3 3	JST SMR-03V	RED 				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

