


BHS4-00-075-X-G-24V

Lighting Dimension



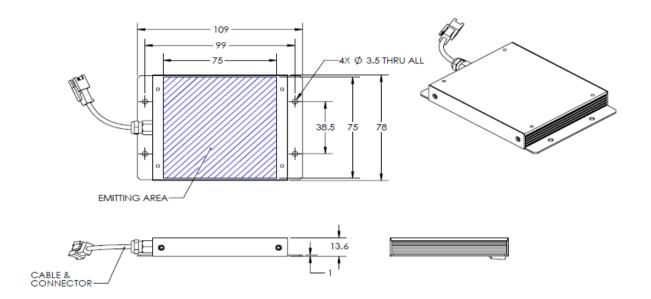

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	100 g
Length / Outer Diameter	109 mm
Width / Inner Diameter	78 mm
Thickness / Height	13.6 mm



BHS4-00-075-X-G-24V

Optical Information								
Part Number		BHS4-00-075-X-G-24V						
LED Color		GREEN						
Wavelength	(nm)	525						
Intensity (±15%)	(Lux)	36000	28320	21624				
Working Distance	(mm)	10	20	30				
	(mm)	10		30				
Illumination (number of row)			X					
Illumination Active Area								
Active Length / Outer Diameter	(mm)		75					
Active Width / Inner Diameter	(mm)	75						
Emission angle	(deg.)							
Eye Safety Class (IEC62471)			EXEMPT					
Electrical Information								
Lighting Supply Voltage								
(constant voltage mode)		24V ± 2%						
Continuous Current	(mA)	24V ± 276 162						
Power Consumption	(MA) (W)							
	(vv)	3.888						
Lighting casing temperature, Operating after 60 minutes	°C		42.8					
Operating after 60 minutes	L L		42.8					
Strobe Mode Specification Pulse Operation			YES					
	_							
Max. Lighting Supply Voltage	(V)	!	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle					
(Constant voltage power supply)	(-/		Recommended at 36VDC					
Pulse Current, (Max. 10msec)	(mA)		486					
(Constant current power supply)	(IIIA)		400					
Max. Trigger Pulse Duration	(msec)	sec) 10						
Duty Cycle			0-10%					
Additional Information								
Additional Cooling Method		A.L.	iched to machine part for better heat dissipation					
Intensity Controller Selection	_	Alla						
				ANG, ST, SD and SDA Series				
CE Conformity		YES						
B 110.0								
RoHS Compliance			YES YES					
RoHS Compliance Connection								
Connection			YES					
Connection Connector Type (Default):	(mm)							
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	Pin	YES JST SMR-03V 500	Cable Color				
Connection Connector Type (Default):	(mm)		YES JST SMR-03V 500 Signal	Cable Color RED				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1	JST SMR-03V 500 Signal LED +	Cable Color RED				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1	JST SMR-03V 500 Signal LED +	RED				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	JST SMR-03V	RED 				
Connection Connector Type (Default): Cable Length out from lighting : Pin Configuration : Application	(mm)	1 2	JST SMR-03V 500 Signal LED + N.C. LED -	RED 				
Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	1 2 3	JST SMR-03V	RED 				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

