




ILLUMINATOR DATA-ID

BHS4-00-100-X-W-24V

Lighting Dimension

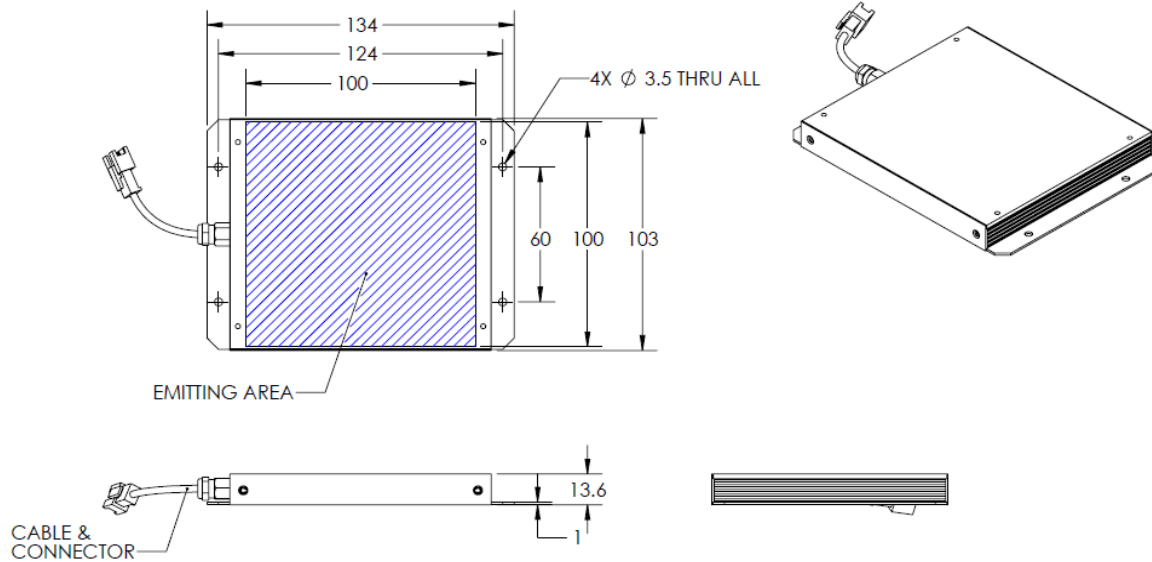


Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	220 g
Length / Outer Diameter	134 mm
Width / Inner Diameter	103 mm
Thickness / Height	13.6 mm



ILLUMINATOR DATA-ID

BHS4-00-100-X-W-24V

Optical Information																											
Part Number		BHS4-00-100-X-W-24V																									
LED Color		WHITE																									
Wavelength	(nm)	*Refer to the Chromaticity Table below																									
Intensity (±15%)	(Lux)	42600	36480	30600																							
Working Distance	(mm)	10	20	30																							
Illumination (number of row)		X																									
Illumination Active Area																											
Active Length / Outer Diameter	(mm)	100																									
Active Width / Inner Diameter	(mm)	100																									
Emission angle	(deg.)	0																									
Eye Safety Class (IEC62471)		EXEMPT																									
*CHROMATICITY TABLE		<table border="1"> <tr> <td>X</td> <td>0.296</td> <td>0.287</td> <td>0.307</td> <td>0.311</td> <td></td> <td>X</td> <td>0.311</td> <td>0.307</td> <td>0.33</td> <td>0.33</td> </tr> <tr> <td>Y</td> <td>0.276</td> <td>0.295</td> <td>0.315</td> <td>0.294</td> <td></td> <td>Y</td> <td>0.294</td> <td>0.315</td> <td>0.339</td> <td>0.318</td> </tr> </table>				X	0.296	0.287	0.307	0.311		X	0.311	0.307	0.33	0.33	Y	0.276	0.295	0.315	0.294		Y	0.294	0.315	0.339	0.318
X	0.296	0.287	0.307	0.311		X	0.311	0.307	0.33	0.33																	
Y	0.276	0.295	0.315	0.294		Y	0.294	0.315	0.339	0.318																	
Electrical Information																											
Lighting Supply Voltage (constant voltage mode)		24V ± 2%																									
Continuous Current	(mA)	384																									
Power Consumption	(W)	9.126																									
Lighting casing temperature, Operating after 60 minutes	°C	50.3																									
Strobe Mode Specification																											
Pulse Operation		YES																									
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC																									
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	1152																									
Max. Trigger Pulse Duration	(msec)	10																									
Duty Cycle		0-10%																									
Additional Information																											
Additional Cooling Method		Attached to machine part for better heat dissipation																									
Intensity Controller Selection		ANG, ST, SD and SDA Series																									
CE Conformity		YES																									
RoHS Compliance		YES																									
Connection																											
Connector Type (Default):		JST SMR-03V																									
Cable Length out from lighting :	(mm)	500																									
Pin Configuration :		Pin	Signal	Cable Color																							
		1	LED +	RED																							
		2	N.C.	---																							
		3	LED -	WHITE																							
																											
Application																											
Illumination Type		Backlight illumination																									
Applicattion Use		Lead frame inspection, shape recognition, size measurement																									



VISION CONSULTANCY
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from
www.machine-vision-shop.com

If you have any questions, you need help composing the
right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptoets



VISION CONSULTANCY

Robert Schumann domein 2
6229 ES Maastricht
The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl
www.machine-vision-shop.com

Scan me to visit
machine-vision-shop

