


### CAS2-00-010-X-R-24V

### **Lighting Dimension**

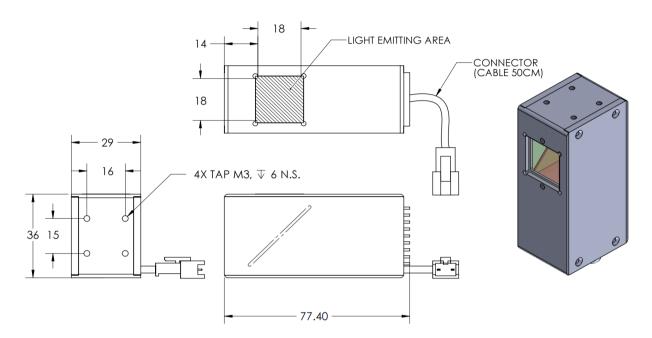

ROHS CE

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	120 g
Length / Outer Diameter	77.4 mm
Width / Inner Diameter	29 mm
Thickness / Height	36 mm



# ILLUMINATOR DATA-ID

## CAS2-00-010-X-R-24V

Optical Information						
Part Number		CAS2-00-010-X-R-24V				
LED Color			RED			
Wavelength	(nm)		630			
Intensity (±15%)	(Lux)	1512 760 487				
Working Distance	(mm)	10	20	30		
Illumination (number of row)	()	10	X	30		
Illumination Active Area			Α			
Active Length / Outer Diameter	(mm)		18			
Active Length / Outer Diameter  Active Width / Inner Diameter						
	(mm)					
Emission angle Eye Safety Class ( IEC62471 )	(deg.)	(deg.) 0 EXEMPT				
Eye Safety Class (TEC02471)			EXCIVIPT			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	75				
Power Consumption	(W)	1.8				
Lighting casing temperature,	(**)	1.6				
Operating after 60 minutes	°C	2C 46.7				
Operating arter of minutes	40.7					
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	4.0					
(Constant voltage power supply)	(V)	(V) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	225				
Max. Trigger Pulse Duration	(	10				
Duty Cycle	(msec)	(msec) 10 0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type		Coaxial Illumination				
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

