


# **ILLUMINATOR DATA-ID**

### CAS2-00-020-X-G-24V



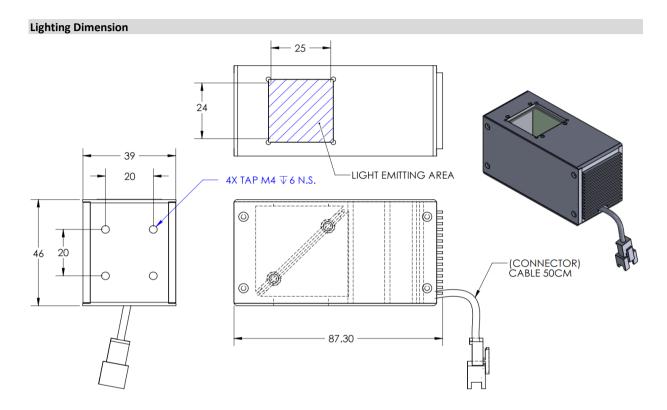

| Mechanical Information    |                                |
|---------------------------|--------------------------------|
| Casing Material           | Aluminium                      |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight                    | 200 g                          |
| Length / Outer Diameter   | 87.3 mm                        |
| Width / Inner Diameter    | 39 mm                          |
| Thickness / Height        | 46 mm                          |



## CAS2-00-020-X-G-24V

| Optical Information                    |        |  |          |             |  |  |
|--|--------|--|----------|-------------|--|--|
| Part Number                            |        | CAS2-00-020-X-G-24V  |          |             |  |  |
| LED Color                              |        |  | GREEN    |             |  |  |
| Wavelength                             | (nm)   |  | 525      |             |  |  |
| Intensity (±15%)                       | (Lux)  | 3370 2120 1500   |          |             |  |  |
| Working Distance                       | (mm)   | 20   | 30       | 40          |  |  |
| Illumination (number of row)           | (,     |  | X        | · ·         |  |  |
| Illumination Active Area               |        |  |          |             |  |  |
| Active Length / Outer Diameter         | (mm)   |  | 25       |             |  |  |
| Active Width / Inner Diameter          | (mm)   | 24   |          |             |  |  |
| Emission angle                         | (deg.) |  | 0        |             |  |  |
| Eye Safety Class ( IEC62471 )          | (ueg.) | EXEMPT   |          |             |  |  |
| Eye sairety class ( 12002471 )         |        |  | EXEMIT 1 |             |  |  |
| Electrical Information                 |        |  |          |             |  |  |
| Lighting Supply Voltage                |        |  |          |             |  |  |
| (constant voltage mode)                |        | 24V ± 2%   |          |             |  |  |
| Continuous Current                     | (mA)   | 24V ± 2%<br>150  |          |             |  |  |
| Power Consumption                      | (W)    | 3.6  |          |             |  |  |
| Lighting casing temperature,           | (44)   | 3.0  |          |             |  |  |
| Operating after 60 minutes             | °C     | 48.1   |          |             |  |  |
| operating area oo minuces              | 40.1   |  |          |             |  |  |
| Strobe Mode Specification              |        |  |          |             |  |  |
| Pulse Operation                        |        | YES  |          |             |  |  |
| Max. Lighting Supply Voltage           |        |  |          |             |  |  |
| (Constant voltage power supply)        | (V)    | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC                            |          |             |  |  |
| Pulse Current, (Max. 10msec)           | +      |  |          |             |  |  |
|  | (mA)   | 450  |          |             |  |  |
| (Constant current power supply)        | (      |  |          |             |  |  |
| Max. Trigger Pulse Duration Duty Cycle | (msec) | (msec) 10 0-10%  |          |             |  |  |
|  |        |  |          |             |  |  |
| Additional Information                 |        |  |          |             |  |  |
| Additional Cooling Method              |        | Attached to machine part for better heat dissipation   |          |             |  |  |
| Intensity Controller Selection         |        | ANG, ST, SD and SDA Series   |          |             |  |  |
| CE Conformity                          |        | YES  |          |             |  |  |
| RoHS Compliance                        |        | YES  |          |             |  |  |
|  |        |  |          |             |  |  |
| Connection                             |        |  |          |             |  |  |
| Connector Type (Default):              |        | JST SMR-03V  |          |             |  |  |
| Cable Length out from lighting :       | (mm)   |  | 500      |             |  |  |
| Pin Configuration :                    |        | Pin  | Signal   | Cable Color |  |  |
|  |        | 1  | LED +    | RED         |  |  |
|  |        | 2  | N.C.     |             |  |  |
|  |        | 3  | LED -    | WHITE       |  |  |
|  |        |  |          |             |  |  |
|  |        |  |          |             |  |  |
|  |        |  |          |             |  |  |
| Application                            |        |  |          |             |  |  |
| Illumination Type                      |        | Coaxial Illumination   |          |             |  |  |
| Applicattion Use                       |        | Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB. |          |             |  |  |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

