


CAS2-00-025-X-B-24V





Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	80 g
Length / Outer Diameter	54 mm
Width / Inner Diameter	33 mm
Thickness / Height	33 mm

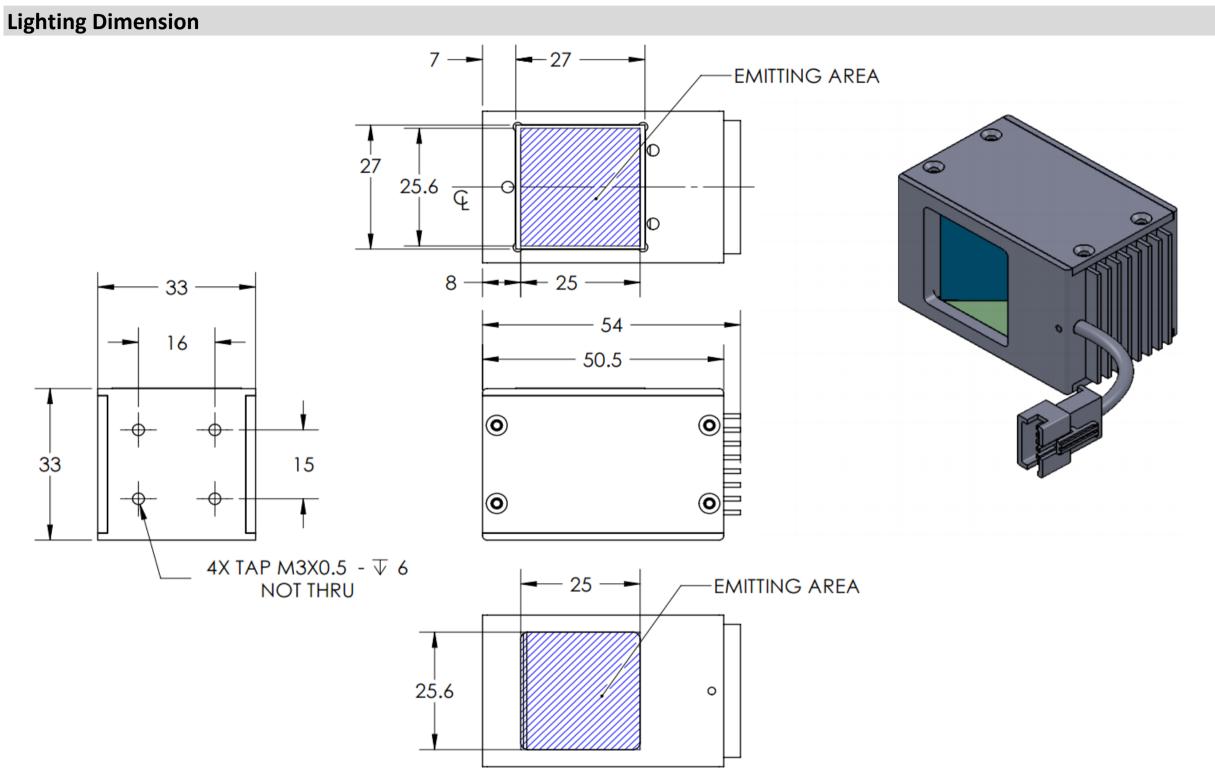

CAS2-00-025-X-B-24V

Optical Information						
Part Number		CAS2-00-025-X-B-24V				
LED Color		BLUE				
Wavelength	(nm)	470				
Intensity (±15%)	(Lux)	11400 6620 4300				
Working Distance	(mm)	20	30	40		
Illumination (number of row)		Х				
Illumination Active Area						
Active Length / Outer Diameter	(mm)	27				
Active Width / Inner Diameter	(mm)	27				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)			II			
Lighting Supply Voltage						
Electrical Information						
			2414 - 29/			
(constant voltage mode) Continuous Current	(mA)	24V ± 2%				
Power Consumption	(W)	<u> 160 </u>				
Lighting casing temperature,	(**)		5.64			
Operating after 60 minutes	°C	62				
			02			
Strobe Mode Specification						
			YES			
Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage		Dubing of				
Pulse Operation Max. Lighting Supply Voltage	(V)	Pulsing at	YES 24VDC to 48VDC, 0-10% Duty Cycle, Recommend	ed at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply)		Pulsing at	24VDC to 48VDC, 0-10% Duty Cycle, Recommend	ed at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec)	(V) (mA)	Pulsing at		ed at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply)		Pulsing at	24VDC to 48VDC, 0-10% Duty Cycle, Recommend	ed at 36VDC		

Additional Information					
Additional Cooling Method		ŀ	Attached to machine part for better heat dissipat	ion	
Intensity Controller Selection			ANG, ST, SD and SDA Series		
CE Conformity	YES				
RoHS Compliance	YES				
Connection					
Connector Type (Default):		JST SMR-03V			
Cable Length out from lighting :	(mm)	500			
Pin Configuration :		Pin	Signal	Cable Color	
		1	LED +	RED	
		2	N.C.		
		3	LED -	WHITE	
Application					
Illumination Type	Coaxial Illumination				
Applicattion Use	Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

