


## CAS2-00-025-X-G-24V





Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	80 g
Length / Outer Diameter	54 mm
Width / Inner Diameter	33 mm
Thickness / Height	33 mm

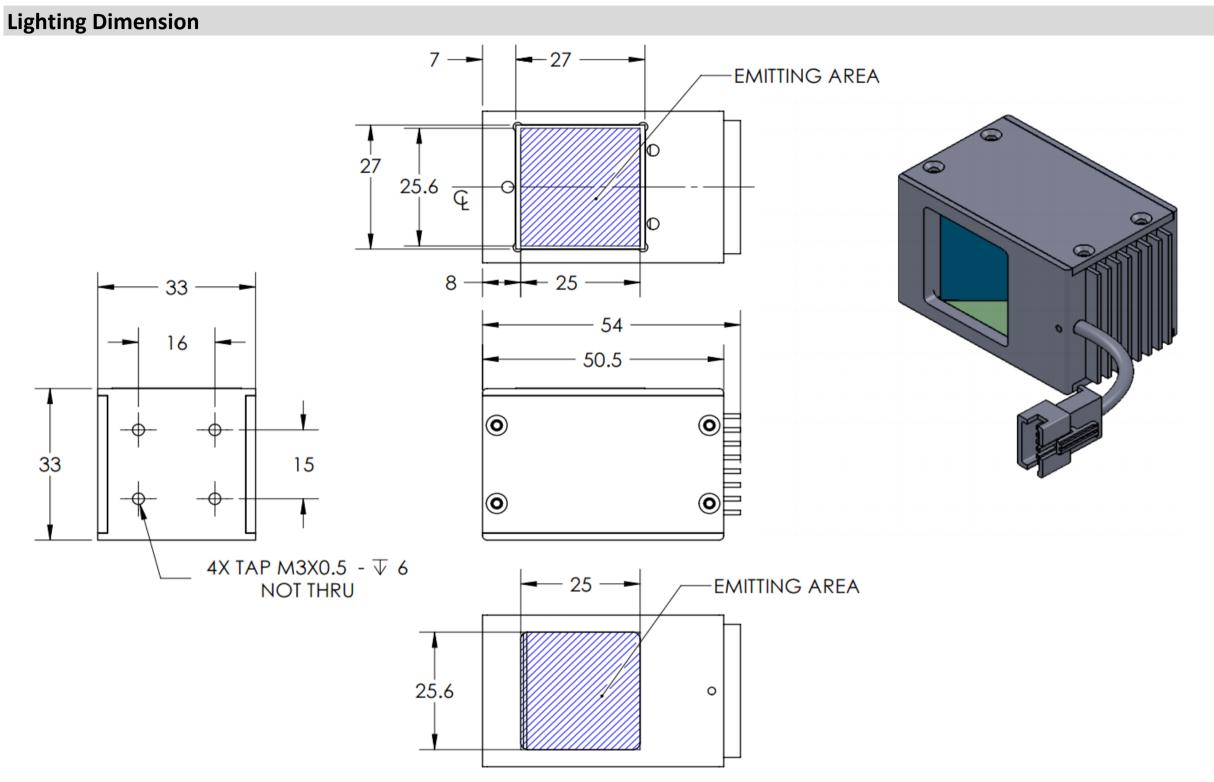

## CAS2-00-025-X-G-24V

Optical Information						
Part Number		CAS2-00-025-X-G-24V				
LED Color		GREEN				
Wavelength	(nm)	525				
Intensity (±15%)	(Lux)	14000 8160 5310				
Working Distance	(mm)	20	30	40		
Illumination (number of row)		X				
Illumination Active Area						
Active Length / Outer Diameter	(mm)	27				
Active Width / Inner Diameter	(mm)	27				
Emission angle	(deg.)	0				
Eye Safety Class ( IEC62471 )		EXEMPT				
Lighting Supply Voltage (constant voltage mode)			24V ± 2%			
			2.01/ + 22/			
Continuous Current	(mA)					
Power Consumption	(MA) (W)	<u>    160                                </u>				
Lighting casing temperature,	(VV)		5.64			
Operating after 60 minutes	°C		62.1			
Strobe Mode Specification						
			YES			
Pulse Operation			YES			
	(V)	Pulsing a	YES at 24VDC to 48VDC, 0-10% Duty Cycle, Recommend	led at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec)		Pulsing a	at 24VDC to 48VDC, 0-10% Duty Cycle, Recommend	led at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply)	(V) (mA)	Pulsing a		led at 36VDC		
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply)		Pulsing a	at 24VDC to 48VDC, 0-10% Duty Cycle, Recommend	led at 36VDC		

Additional Information						
Additional Cooling Method		ŀ	Attached to machine part for better heat dissipat	ion		
Intensity Controller Selection			ANG, ST, SD and SDA Series			
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type	Coaxial Illumination					
Applicattion Use	Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

