


CAS2-00-025-X-R-24V





Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	80 g
Length / Outer Diameter	54 mm
Width / Inner Diameter	33 mm
Thickness / Height	33 mm

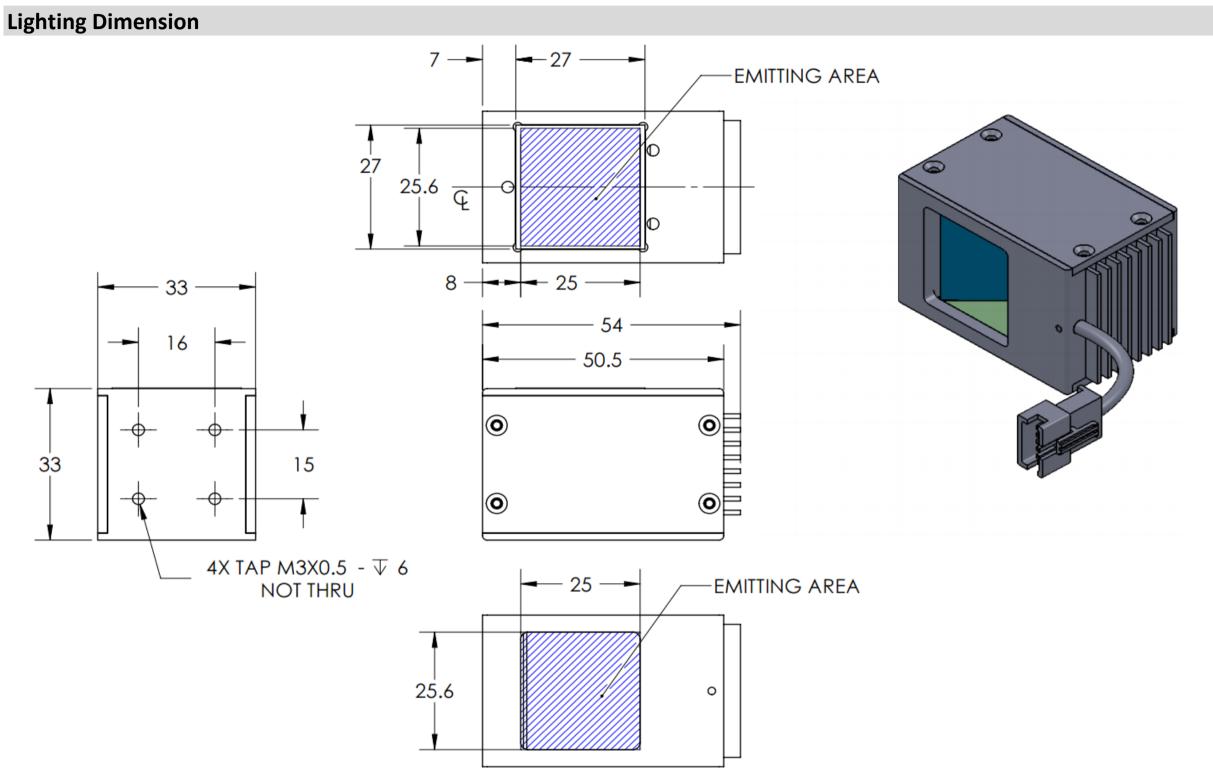

CAS2-00-025-X-R-24V

Optical Information						
Part Number		CAS2-00-025-X-R-24V				
LED Color		RED				
Wavelength	(nm)	630				
Intensity (±15%)	(Lux)	4910 2860 1870				
Working Distance	(mm)	20	30	40		
Illumination (number of row)		X				
Illumination Active Area						
Active Length / Outer Diameter	(mm)	27				
Active Width / Inner Diameter	(mm)	27				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)			EXEMPT			
Lighting Supply Voltage						
Electrical Information						
(constant voltage mode)			2414 + 294			
Continuous Current	(mA)	24V ± 2% 150				
Power Consumption	(W)	36				
Tower consumption	(**)		50			
Lighting casing temperature.						
Lighting casing temperature, Operating after 60 minutes	°C		64.7			
Lighting casing temperature, Operating after 60 minutes	°C		64.7			
	°C		64.7			
Operating after 60 minutes	°C		64.7			
Operating after 60 minutes	°C		64.7			
Operating after 60 minutes Strobe Mode Specification	C		64.7 YES			
Operating after 60 minutes Strobe Mode Specification Pulse Operation			YES			
Operating after 60 minutes Strobe Mode Specification	°C	Pulsing		nded at 36VDC		
Operating after 60 minutes Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing	YES at 24VDC to 48VDC, 0-10% Duty Cycle, Recomme	nded at 36VDC		
Operating after 60 minutes Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec)		Pulsing	YES	nded at 36VDC		
Operating after 60 minutes Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage	(V)	Pulsing	YES at 24VDC to 48VDC, 0-10% Duty Cycle, Recomme	nded at 36VDC		

Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type	Coaxial Illumination					
Applicattion Use	Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

