


ILLUMINATOR DATA-ID

CAS2-00-070-X-G-24V



Mechanical Information			
Casing Material	Aluminium		
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%		
Weight	740 g		
Length / Outer Diameter	139.6 mm		
Width / Inner Diameter	89 mm		
Thickness / Height	95 mm		

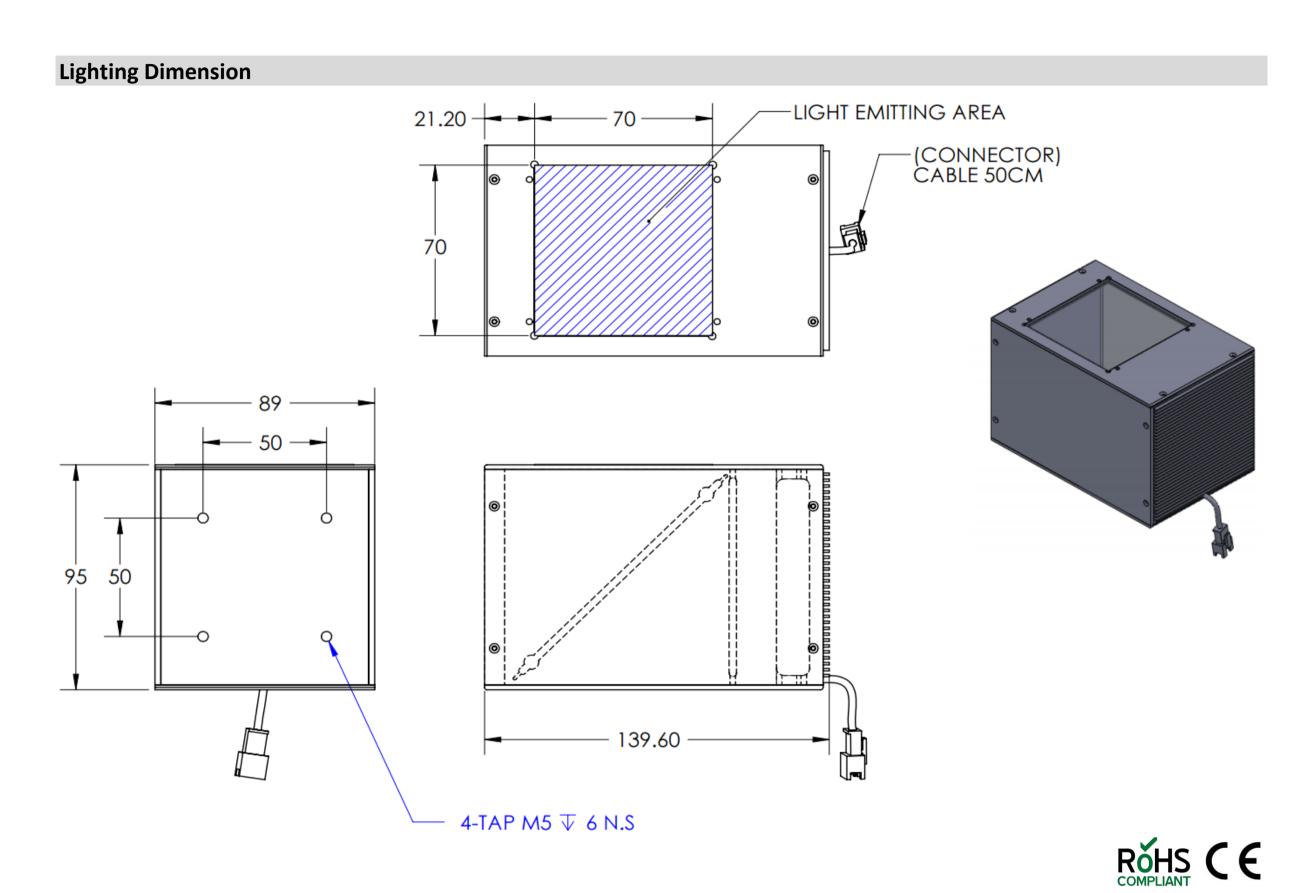

CAS2-00-070-X-G-24V

Optical Information						
Part Number		CAS2-00-070-X-G-24V				
LED Color			GREEN			
Wavelength	(nm)	525				
Intensity (±15%)	(Lux)	6230	4870	3870		
Working Distance	(mm)	40	50	60		
Illumination (number of row)			X			
Illumination Active Area	(70			
Active Length / Outer Diameter Active Width / Inner Diameter	(mm)	70				
Emission angle	(mm) (deg.)					
Eye Safety Class (IEC62471)	(ueg.)		EXEMPT			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	560				
Power Consumption	(W)	13.44				
Lighting casing temperature,						
Operating after 60 minutes	°C	°C 52.1				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	() ()	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
(Constant voltage power supply)	(V)	Puising at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)	(mA)	1680				
(Constant current power supply)	(IIIA)	1000				
Max. Trigger Pulse Duration	(msec)	10				
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Connector Type (Default):	, ,	JST SMR-03V				
Cable Length out from lighting:	(mm)	2:	500			
Pin Configuration :		Pin 1	Signal	Cable Color		
		<u>1</u> 2	LED + N.C.	RED		
		3	N.C. LED -	 WHITE		
		3	LLD -	WITTE		
Application						
Illumination Type		Coaxial Illumination				
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				
		Sarrace inspection and distinient, water, metal surface, filli, Leb and glass, pattern on reb.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

