


## **ILLUMINATOR DATA-ID**

## CAS2-00-070-X-R-24V



| Mechanical Information    |                                |
|---------------------------|--------------------------------|
| Casing Material           | Aluminium                      |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight                    | 740 g                          |
| Length / Outer Diameter   | 139.6 mm                       |
| Width / Inner Diameter    | 89 mm                          |
| Thickness / Height        | 95 mm                          |

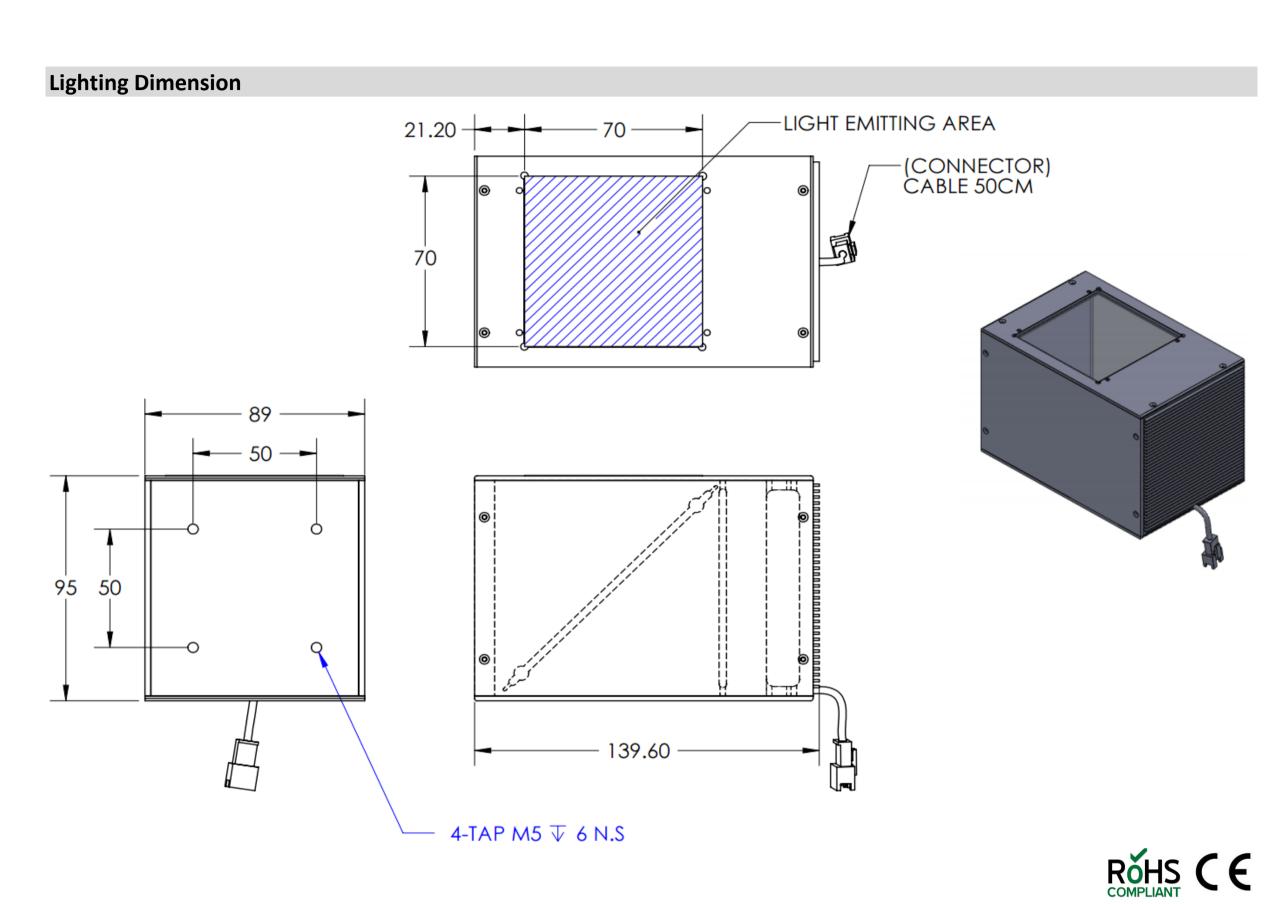

## CAS2-00-070-X-R-24V

| Optical Information                           |  |  |        |             |  |  |
|---|--|--|--------|-------------|--|--|
| Part Number                                   |  | CAS2-00-070-X-R-24V  |        |             |  |  |
| LED Color                                     |  | RED  |        |             |  |  |
| Wavelength                                    | (nm)   | 630  |        |             |  |  |
| Intensity (±15%)                              | (Lux)  | 4670 3680 2960   |        |             |  |  |
| Working Distance                              | (mm)   | 40   | 50     | 60          |  |  |
| Illumination (number of row)                  |  |  | X      |             |  |  |
| Illumination Active Area                      | , ,  |  |        |             |  |  |
| Active Length / Outer Diameter                | (mm)   | 70   |        |             |  |  |
| Active Width / Inner Diameter                 | (mm)   |  | 70     |             |  |  |
| Emission angle  Eye Safety Class ( IEC62471 ) | (deg.)   | 0<br>EXEMPT  |        |             |  |  |
| LALIVII 1                                     |  |  |        |             |  |  |
| Electrical Information                        |  |  |        |             |  |  |
| Lighting Supply Voltage                       |  |  |        |             |  |  |
| (constant voltage mode)                       |  | 24V ± 2%   |        |             |  |  |
| Continuous Current                            | (mA)   | 525  |        |             |  |  |
| Power Consumption                             | (W)  | 12.6   |        |             |  |  |
| Lighting casing temperature,                  |  |  |        |             |  |  |
| Operating after 60 minutes                    | °C   |  | 52.1   |             |  |  |
|   |  |  |        |             |  |  |
| Strobe Mode Specification                     |  |  |        |             |  |  |
| Pulse Operation                               |  | YES  |        |             |  |  |
| Max. Lighting Supply Voltage                  | (V)  | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC  |        |             |  |  |
| (Constant voltage power supply)               | ( • )  | ruising at 24VDC to 46VDC, 0-10% Duty Cycle, Neconimended at 30VDC |        |             |  |  |
| Pulse Current, (Max. 10msec)                  | (mA)   | 1575   |        |             |  |  |
| (Constant current power supply)               |  |  |        |             |  |  |
| Max. Trigger Pulse Duration                   | (msec)   |  |        |             |  |  |
| Duty Cycle                                    | 0-10%  |  |        |             |  |  |
|   |  |  |        |             |  |  |
| Additional Information                        |  |  |        |             |  |  |
| Additional Cooling Method                     |  | Attached to machine part for better heat dissipation               |        |             |  |  |
| Intensity Controller Selection                |  | ANG, ST, SD and SDA Series   |        |             |  |  |
| CE Conformity                                 | YES  |  |        |             |  |  |
| RoHS Compliance                               | YES  |  |        |             |  |  |
|   |  |  |        |             |  |  |
| Connection                                    |  |  |        |             |  |  |
| Connector Type (Default):                     |  | JST SMR-03V  |        |             |  |  |
| Cable Length out from lighting :              | (mm)   |  | 500    |             |  |  |
| Pin Configuration :                           |  | Pin  | Signal | Cable Color |  |  |
|   |  | 1  | LED +  | RED         |  |  |
|   |  | 2  | N.C.   |             |  |  |
|   |  | 3  | LED -  | WHITE       |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   |  |  |        |             |  |  |
|   | •  |  |        |             |  |  |
| A It  |  |  |        |             |  |  |
| Application                                   |  |  |        |             |  |  |
| Illumination Type                             |  | Coaxial Illumination   |        |             |  |  |
| Applicattion Use                              | Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB. |  |        |             |  |  |
|   |  |  |        |             |  |  |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

