


### CAS2-45-020-X-G-24V

### **Lighting Dimension** 25



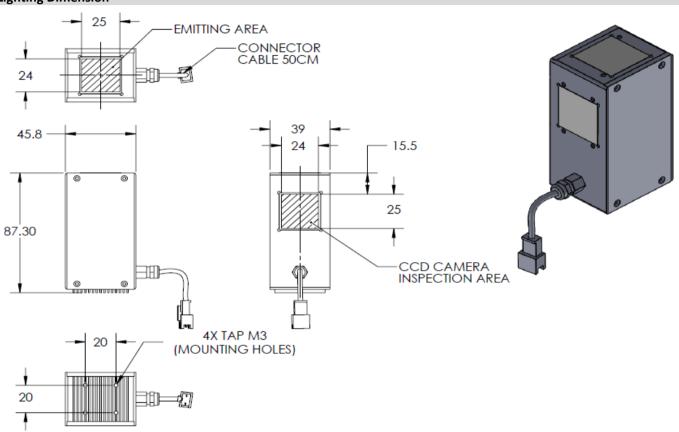

Mechanical Information		
Casing Material	Aluminium	
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%	
Weight	200 g	
Length / Outer Diameter	87.3 mm	
Width / Inner Diameter	39 mm	
Thinkness	45.8 mm	



# **ILLUMINATOR DATA - ID**

## CAS2-45-020-X-G-24V

Optical Information							
Part Number		CAC2 4E 020 V C 24V					
LED Color		CAS2-45-020-X-G-24V GREEN					
Wavelength	(nm)	GREEN 470					
Intensity (±15%)	(Lux)	2510 1470 1010					
Working Distance	(mm)	20	30	40			
Illumination (number of row)	(11111)	20	X	40			
Illumination Active Area		^					
Active Length / Outer Dia.	(mm)	75					
	(mm)	25 24					
Active Width / Inner Dia. Emission angle	(daa )	45					
Eye Safety Class ( IEC62471 )	(deg.)	45 					
Eye Janety Class (IECD2471)							
Electrical Information							
		<u> </u>					
	nstant						
voltage mode)	/ A3	<del> </del>	24V ± 2%				
Continuous Current	(mA)		150				
Power Consumption	(W)	1	3.6				
	rating						
after 60 minutes	°C		55				
Strobe Mode Specification							
Pulse Operation			YES				
Max. Lighting Supply Voltage (Cor	nstant		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
voltage power supply)	(V)	Recommended at 36VDC					
	nstant (man)						
	(mA)	450					
current power supply) Max. Trigger Pulse Duration	(msec)	10					
	(IIISEC)	10 0-10%					
Duty Cycle			0-10%				
Additional Information							
Additional Cooling Marth and		All the day and the transfer of the state of					
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, ST, SD and SDA series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (Default):			JST SMR-03V				
Cable Length out from lighting:	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	N.C.				
		3	LED -	WHITE			
		Angle -					
Application	dication						
Illumination Type	Convid Illuminator						
Application Use		Coaxial Illuminator					
		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



#### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

