


## Lighting Dimension

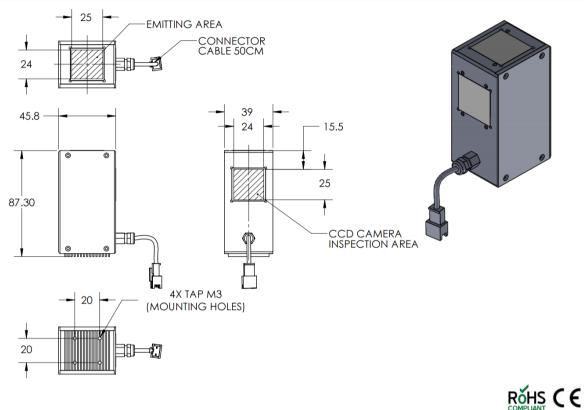

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	200 g
Length / Outer Diameter	45.8 mm
Width / Inner Diameter	39 mm
Thickness / Height	87.3 mm

## **ILLUMINATOR DATA-ID**

## CAS2-45-020-X-R-24V

TI

Optical Information						
Part Number			CAS2-45-020-X-R-24V			
LED Color			RED			
Wavelength	(nm)	630				
Intensity (±15%)	(Lux)	1050	860	700		
Working Distance	(mm)	20	30	40		
llumination (number of row)			Х			
Ilumination Active Area						
Active Length / Outer Diameter	(mm)	25				
Active Width / Inner Diameter	(mm)	24				
Emission angle	(deg.)	45				
Eye Safety Class ( IEC62471 )		EXEMPT				
Electrical Information						
Lighting Supply Voltage						
Lighting Supply Voltage			241/ + 29/			
(constant voltage mode)	(m ^)	24V ± 2%				
Continuous Current	(mA) (W)	80				
Power Consumption	(\v\)	1.92				
Lighting casing temperature,						
Operating after 60 minutes	-'L	°C 56				
Strobe Mode Specification						
			NEC			
Pulse Operation			YES			
Max. Lighting Supply Voltage Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	240				
Max. Trigger Pulse Duration	(msec)	ec) 10				
Duty Cycle		0.10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
·						
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
			· •			
Application						
llumination Type		Coaxial Illumination				
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				
upplication use		Surface inspection and anginnent, water, metal Sufface, IIIII, LCD and glass, pattern on PCB.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

