


## CAS2-45-040-X-G-24V

## **Lighting Dimension**



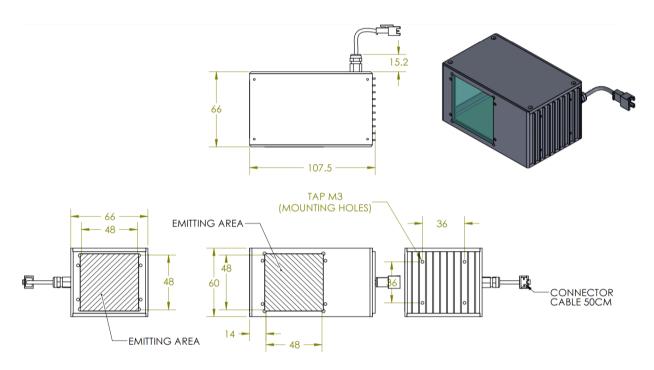

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	350 g
Length / Outer Diameter	107.5 mm
Width / Inner Diameter	60 mm
Thickness / Height	66 mm



# CAS2-45-040-X-G-24V

Optical Information						
Part Number	T	CAS2-45-040-X-G-24V				
LED Color			GREEN			
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	3660	2980	2090		
Working Distance	(mm)	20	30	50		
Illumination (number of row)	` ′	-	X			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	48				
Active Width / Inner Diameter	(mm)	48				
Emission angle	(deg.)	45				
Eye Safety Class ( IEC62471 )		EXEMPT				
Electrical Information						
Lighting Supply Voltage	T			·		
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	350				
Power Consumption	(W)	8.4				
Lighting casing temperature,		•••				
Operating after 60 minutes	°C	59.6				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	0.0					
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)	,	4000				
(Constant current power supply)	(mA)	1050				
Max. Trigger Pulse Duration	(msec)	10				
Duty Cycle	,,	0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
		TOTAL COLUMN				
Connector Type (Default):	()	JST SMR-03V				
Cable Length out from lighting :	(mm)	Pin	500 Signal	Cable Calar		
Pin Configuration :	$\vdash$	Pin1	Signal	Cable Color RED		
	-	2	LED + N.C.			
	-			WHITE		
		3	LED -	WHILE		
Application						
Illumination Type		Coaxial Illumination				
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				
rapplicattion osc		ounace inspection and anginneric, water, metal surface, film, LCD and glass, pattern on PCB.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

