
**ILLUMINATOR DATA-ID** 

### CAS2-45-040-X-R-24V

TMS

#### **Lighting Dimension**

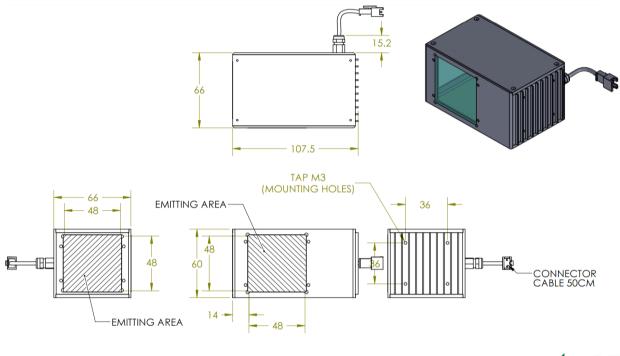

ROHS CE

Mechanical Information			
Casing Material	Aluminium		
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%		
Weight	350 g		
Length / Outer Diameter	107.5 mm		
Width / Inner Diameter	60 mm		
Thickness / Height	66 mm		

# **ILLUMINATOR DATA-ID**

## CAS2-45-040-X-R-24V

TI

Optical Information     Part Number       Part Number     Image: Constraint of the second se	2070 20	CAS2-45-040-X-R-24V RED 630 1710 30 X 48 48 48 45 FURMAT	1280 50			
LED Color     (nm)       Wavelength     (nm)       Intensity (±15%)     (Lux)       Working Distance     (mm)       Illumination (number of row)     Illumination Active Area       Active Length / Outer Diameter     (mm)       Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )     IECectrical Information		RED           630           1710           30           X           48           48           45				
Wavelength     (nm)       Intensity (±15%)     (Lux)       Working Distance     (mm)       Illumination (number of row)		RED           630           1710           30           X           48           48           45				
Intensity (±15%) (Lux) Working Distance (mm) Illumination (number of row) Illumination Active Area Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class ( IEC62471 ) Electrical Information		1710 30 X 48 48 48 45				
Working Distance     (mm)       Illumination (number of row)     Illumination Active Area       Active Length / Outer Diameter     (mm)       Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )     Image: Comparison of the second secon		30 X 48 48 48 45				
Illumination (number of row)     Illumination Active Area       Active Length / Outer Diameter     (mm)       Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )     Image: Class ( IEC62471 )	20	X 48 48 45	50			
Illumination Active Area     (mm)       Active Length / Outer Diameter     (mm)       Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )     Electrical Information		48 48 45				
Active Length / Outer Diameter     (mm)       Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )     Electrical Information		48 45				
Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )		48 45				
Active Width / Inner Diameter     (mm)       Emission angle     (deg.)       Eye Safety Class ( IEC62471 )		45				
Emission angle (deg.) Eye Safety Class ( IEC62471 ) Electrical Information		45	48			
Eye Safety Class ( IEC62471 ) Electrical Information		EVENADT				
		EXEMPT				
Linkting Currely Veltage						
Lighting Supply Voltage		241/ + 2%				
(constant voltage mode) Continuous Current (mA)	24V ± 2%					
	175 4.2					
	4.2					
Lighting casing temperature,	45.3					
Operating after 60 minutes °C	45.5					
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage (Constant voltage power supply) (V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC					
Pulse Current, (Max. 10msec) (Constant current power supply) (mA)		525				
Max. Trigger Pulse Duration (msec)		10				
Duty Cycle		0-10%				
Additional Information						
Additional Cooling Method	Attached to machine part for better heat dissipation					
Intensity Controller Selection	ANG, ST, SD and SDA Series					
CE Conformity	YES					
RoHS Compliance	YES					
		100				
Connection						
Connector Type (Default):	JST SMR-03V					
Cable Length out from lighting : (mm)		500				
Pin Configuration :	Pin	Signal	Cable Color			
	1	LED +	RED			
	2	N.C.				
	3	LED -	WHITE			
	-					
Application						
Illumination Type	Coaxial Illumination					
Applicattion Use	Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

