


CAS3-00-150-X-G-24V

Lighting Dimension



Mechanical Information				
Wiechanical information				
Casing Material	Aluminium			
Storage Temperature Bonce	Town 0. AF°C Humidity 20.9F9/			
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%			
Weight	2000 g			
Length / Outer Diameter	217.5 mm			
Length / Outer Blameter	217.5 mm			
Width / Inner Diameter	160 mm			
Thickness / Height	160.4 mm			

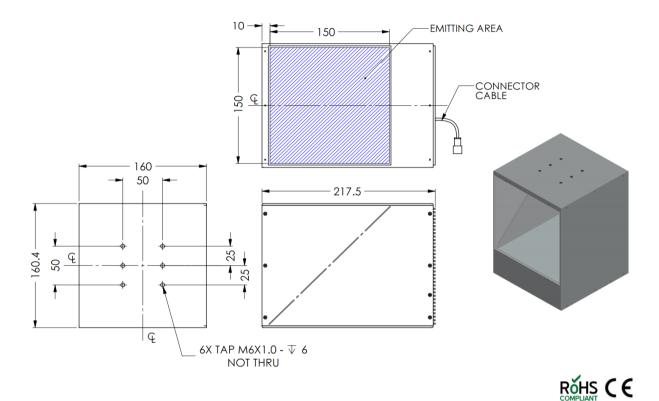

CAS3-00-150-X-G-24V

Optical Information						
Part Number			CAS3-00-150-X-G-24V			
LED Color		GREEN				
Wavelength	(nm)	525				
Intensity (±15%)	(Lux)	TBA TBA TBA				
Working Distance	(mm)	100	110	120		
Illumination (number of row)	, ,		X			
Illumination Active Area						
Active Length / Outer Diameter	(mm)		150			
Active Width / Inner Diameter	(mm)		150			
Emission angle	(deg.)					
Eye Safety Class (IEC62471)	EXEMPT					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	24V ± 2% 891				
Power Consumption	(W)					
Lighting casing temperature,	(**/	21.38				
Operating after 60 minutes	°C		ТВА			
Operating arter of minutes	I DA					
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	(V) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)	(mA)	2673				
(Constant current power supply)	, ,					
Max. Trigger Pulse Duration Duty Cycle	(msec)	(msec) 10 0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection	ANGX, ST, SD and SDA Series					
CE Conformity		YES				
RoHS Compliance	YES					
·						
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
		-				
Application						
Illumination Type	Coaxial Illumination					
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

