


ILLUMINATOR DATA-ID

CAS3-00-200-X-B-24V

Lighting Dimension

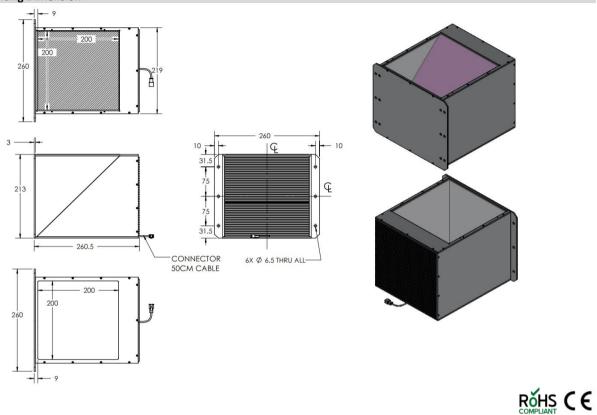

| Mechanical Information | |
|---------------------------|--------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight | 3200 g |
| Length / Outer Diameter | 260.5 mm |
| Width / Inner Diameter | 219 mm |
| Thickness / Height | 213 mm |



CAS3-00-200-X-B-24V

| Optical Information | | | | | | | |
|---|--------|---|---|-------------|--|--|--|
| | | | | | | | |
| Part Number | | | CAS3-00-200-X-B-24V | | | | |
| LED Color | , , | | BLUE | | | | |
| Wavelength | (nm) | 520C F | 450 | 4500 | | | |
| Intensity (±15%) | (Lux) | 5386.5 | 4887 | 4509 120 | | | |
| Working Distance Illumination (number of row) | (mm) | 100 | 110 X | 120 | | | |
| Illumination (ridinger of row) | | | ^ | | | | |
| Active Length / Outer Diameter | (mm) | 200 | | | | | |
| Active Width / Inner Diameter | (mm) | 200 | | | | | |
| Emission angle | (deg.) | 0 | | | | | |
| Eye Safety Class (IEC62471) | (ueg.) | U II | | | | | |
| Eye Surety Glass (12002471) | | | " | | | | |
| Electrical Information | | | | | | | |
| Lighting Supply Voltage | | | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | | | |
| Continuous Current | (mA) | | 1584 | | | | |
| Power Consumption | (W) | 38.02 | | | | | |
| Lighting casing temperature, | ,, | 30.02 | | | | | |
| Operating after 60 minutes | °c | 65.1 | | | | | |
| | | | | | | | |
| Strobe Mode Specification | | | | | | | |
| Pulse Operation | | YES | | | | | |
| Max. Lighting Supply Voltage | | | | | | | |
| (Constant voltage power supply) | (V) | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC | | | | | |
| Pulse Current, (Max. 10msec) | (mA) | | 4752 | | | | |
| (Constant current power supply) | | | | | | | |
| Max. Trigger Pulse Duration Duty Cycle | (msec) | | 10 0-10% | | | | |
| | ' | | | | | | |
| Additional Information | | | | | | | |
| Additional Cooling Method | | Atta | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANGX, ST, SD and SDA Series | | | | | |
| CE Conformity | | | YES | | | | |
| RoHS Compliance | | YES | | | | | |
| | | | | | | | |
| Connection | | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | | |
| Cable Length out from lighting : | (mm) | | 500 | | | | |
| Pin Configuration : | | Pin | Signal | Cable Color | | | |
| | | 1 | LED + | RED | | | |
| | | 2 | N.C. | | | | |
| | | 3 | LED - | WHITE | | | |
| | | | | | | | |
| | | | 1 | | | | |
| | | | | | | | |
| Application | | | | | | | |
| Application Illumination Type Application Use | | | Coaxial Illumination nent, wafer, metal surface, film, LCD and glass, p | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

