


ILLUMINATOR DATA-ID

CAS3-00-250-X-B-24V

Lighting Dimension

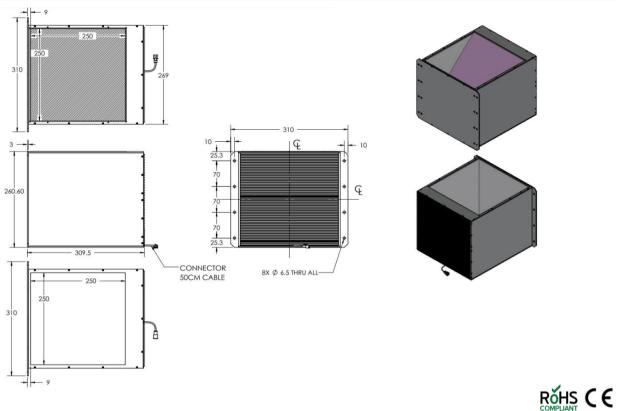

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	5000 g
Length / Outer Diameter	309.5 mm
Width / Inner Diameter	269 mm
Thickness / Height	260.6 mm



ILLUMINATOR DATA-ID

CAS3-00-250-X-B-24V

Optical Information							
Part Number			CAS3-00-250-X-B-24V				
LED Color			BLUE				
Wavelength	(nm)		470				
Intensity (±15%)	(Lux)	1587.6	1487.7	1381.05			
Working Distance	(mm)	100	110	120			
Illumination (number of row)			X				
Illumination Active Area							
Active Length / Outer Diameter	(mm)		250				
Active Width / Inner Diameter	(mm)	250					
Emission angle	(deg.)		0				
Eye Safety Class (IEC62471)							
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)			24V ± 2%				
Continuous Current	(mA)		2250				
Power Consumption	(W)		54				
Lighting casing temperature,	,,,,						
Operating after 60 minutes	°C		63.4				
operating arter oo minates			03.4				
Strobe Mode Specification							
Pulse Operation			YES				
Max. Lighting Supply Voltage	(V)	Pulsing at 24	VDC to 48VDC, 0-10% Duty Cycle, Recommended	t at 36VDC			
(Constant voltage power supply)	(*)	r disting at 24	VDC to 40VDC, O 1070 Daty Cycle, Recommended	a at 3000C			
Pulse Current, (Max. 10msec)	(4)		6750				
(Constant current power supply)	(mA)		6750				
Max. Trigger Pulse Duration	(msec)		10				
Duty Cycle	,,		0-10%				
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANGX, ST, SD and SDA Series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (Default):			JST SMR-03V				
Cable Length out from lighting :	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	N.C.				
		3	LED -	WHITE			
Application							
Illumination Type		Coaxial Illumination					
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					
	,						



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

