


ILLUMINATOR DATA-ID

CAS3-00-250-X-R-24V

Lighting Dimension

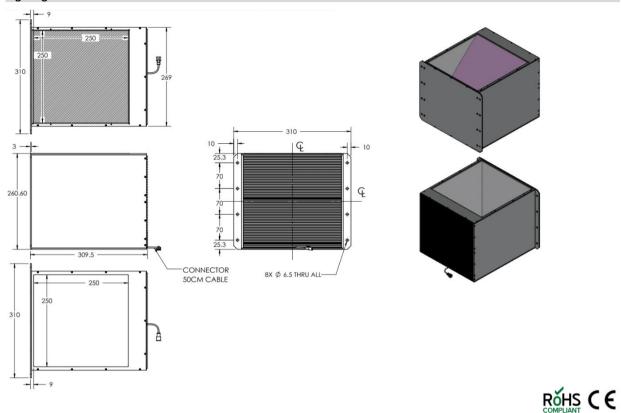

Mechanical Information	
Casing Material	Aluminium
Casing Waterial	Audiningin
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	5000 g
Length / Outer Diameter	309.5 mm
Width / Inner Diameter	269 mm
Thickness / Height	260.6 mm



CAS3-00-250-X-R-24V

Ontical Information							
Optical Information							
Part Number		CAS3-00-250-X-R-24V					
LED Color			RED				
Wavelength	(nm)		620				
Intensity (±15%)	(Lux)	3348	3132	2902.5			
Working Distance	(mm)	100	110	120			
Illumination (number of row)	1		X				
Illumination Active Area							
Active Length / Outer Diameter	(mm)	250					
Active Width / Inner Diameter	(mm)		250				
Emission angle	(deg.)		0				
Eye Safety Class (IEC62471)	(ueg.)	EXEMPT					
Lye Jaiety Class (IEC02471)			LALIVIF I				
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)			24V ± 2%				
Continuous Current	(mA)						
Power Consumption	(MA)		1944 46.66				
Lighting casing temperature,	((()		46.66				
	°C	C2 *					
Operating after 60 minutes	°C		63.4				
Strobe Mode Specification							
Pulse Operation			YES				
Max. Lighting Supply Voltage	0.0						
(Constant voltage power supply)	(V)	Pulsing at 24	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)							
(Constant current power supply)	(mA)		5832				
	(msec)		10				
Max. Trigger Pulse Duration Duty Cycle	(msec)		10				
buty cycle		0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANGX, ST, SD and SDA Series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting :	(mm)	500					
Pin Configuration :	\	Pin	Signal	Cable Color			
co.niguration .	 	1	LED +	RED			
	 	2	N.C.	NLU			
	 						
		3	LED -	WHITE			
		Ang the second s					
Application							
Illumination Type		Coaxial Illumination					
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					
Impolicattion USE		Junioce inspection and digitiment, water, metal surface, fillin, LCD and glass, pattern on FCo.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

