


## DFR4-00-050-1-G-24V

## **Lighting Dimension**



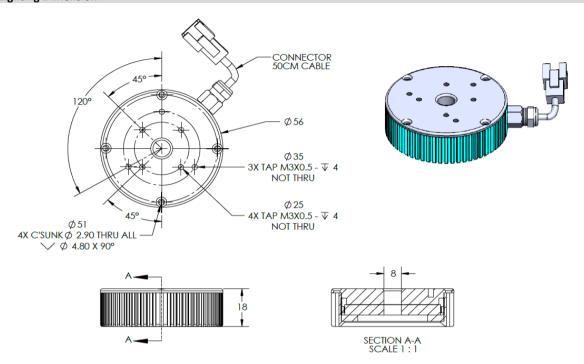

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	60 g
Length / Outer Diameter	56 mm
Width / Inner Diameter	8 mm
Thickness / Height	18 mm



## DFR4-00-050-1-G-24V

Optical Information							
Part Number	DLQ2-90-050-1-G-24V						
LED Color			GREEN				
Wavelength	(nm)		525				
Intensity (±15%)	(Lux)	TBA	TBA	TBA			
Working Distance	(mm)	10	15	20			
	(mm)	10	15	20			
Illumination (number of row)			1				
Illumination Active Area							
Active Length / Outer Diameter	(mm)		31.8				
Active Width / Inner Diameter	(mm)		8				
Emission angle	(deg.)	0					
Eye Safety Class ( IEC62471 )		EXEMPT					
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)			24V ± 2%				
	( A)						
Continuous Current	(mA)	<del> </del>	108				
Power Consumption	(W)	2.6					
Lighting casing temperature,							
Operating after 60 minutes	°C		47				
	· ·						
Strobe Mode Specification							
Pulse Operation			YES				
Max. Lighting Supply Voltage	0.0	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle					
(Constant voltage power supply)	(V)	Recommended at 36VDC					
Pulse Current, (Max. 10msec)							
	(mA)	324					
(Constant current power supply)	<u> </u>						
Max. Trigger Pulse Duration	(msec)	(msec) 10					
Duty Cycle	0-10%						
Additional Information							
Additional Cooling Method	Attached to machine part for better heat dissipation						
Intensity Controller Selection	ANG, ST, SD and SDA Series						
CE Conformity	YES						
RoHS Compliance	YES						
	u.						
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting :	(mm)	500					
Pin Configuration :	()	Pin	Signal	Cable Color			
Tim Comiguration .	<del>                                     </del>		Signal LED +				
	<del> </del>	1		RED			
	<u> </u>	2	N.C.				
		3	LED -	WHITE			
Application							
			Diffused Illumination				
Application Illumination Type Application Use		Printed character on If chia	Diffused Illumination ss, PCB component, printing on caps, and wafer C	CR inspection			



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

