


DLR3-45-080-1-R-24V

Lighting Dimension



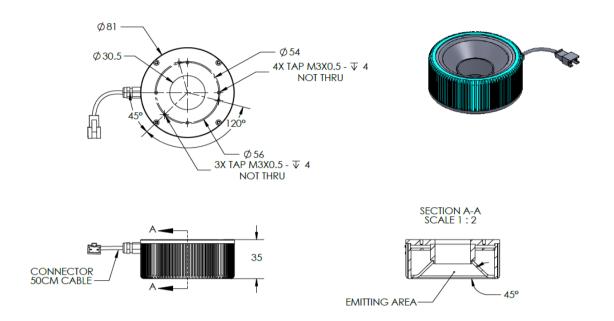

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	145 g
Length / Outer Diameter	81 mm
Width / Inner Diameter	30.5 mm
Thickness / Height	35 mm



DLR3-45-080-1-R-24V

	_						
Optical Information							
Part Number			DLR3-45-080-1-R-24V				
LED Color			RED				
Wavelength	(nm)		620				
Intensity (±15%)	(Lux)	7398	7171	5978			
Working Distance	(mm)	5	15	25			
Illumination (number of row)			1				
Illumination Active Area							
Active Length / Outer Diameter	(mm)	69					
Active Width / Inner Diameter	(mm)	32.5					
Emission angle	(deg.)	45					
Eye Safety Class (IEC62471)		EXEMPT					
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)		24V ± 2%					
Continuous Current	(mA)	180					
Power Consumption	(W)	4.32					
Lighting casing temperature, Operating after 60 minutes	°c	F4					
Operating after 60 minutes	L L		51				
Strobe Mode Specification							
Pulse Operation		YES					
Max. Lighting Supply Voltage	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle					
(Constant voltage power supply)	(*)	Recommended at 36VDC					
Pulse Current, (Max. 10msec)	(mA)	540					
(Constant current power supply)							
Max. Trigger Pulse Duration	(msec) 10						
Duty Cycle		0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection	ANG, ST, SD and SDA Series						
CE Conformity		YES					
RoHS Compliance	YES						
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting :	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	N.C.				
		3	LED -	WHITE			
	•	•					
A - I - I - I							
Application							
Illumination Type		Diffused Illumination					
Applicattion Use		Character recognition on shining surface, lead inspection					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

