


# **ILLUMINATOR DATA-ID**

## DLS2-60-100-1-G-24V

### **Lighting Dimension**

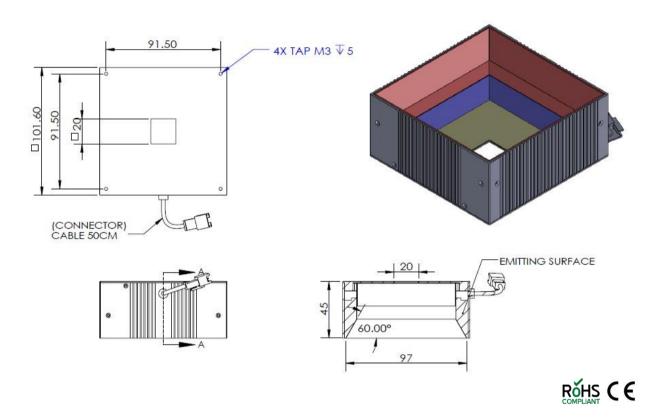

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	300g
Length / Outer Diameter	101.6 mm
Width / Inner Diameter	20 mm
Thickness / Height	45 mm



## DLS2-60-100-1-G-24V

Optical Information						
Part Number			DLR3-60-50-1-G-24V			
LED Color		DLR3-60-50-1-G-24V  GREEN				
Wavelength	(nm)	525				
Intensity (±15%)	(Lux)	TBA	TBA	TBA		
Working Distance	(mm)	14	19	24		
Illumination (number of row)			1			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	98.4				
Active Width / Inner Diameter	(mm)	79				
Emission angle	(deg.)	60				
Eye Safety Class ( IEC62471 )	EXEMPT					
*CHROMATICITY TABLE						
Electrical Information						
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	240				
Power Consumption	(W)	5.76				
Lighting casing temperature,	86					
Operating after 60 minutes	°C		43.3			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)	Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	720				
Max. Trigger Pulse Duration	(msec) 10					
Duty Cycle	0-10%					
a line and a						
Additional Information						
Additional Cooling Method	Attached to machine part for better heat dissipation					
Intensity Controller Selection	ANG, ST, SD and SDA Series					
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Connector Type (Default):  Cable Length out from lighting :	(mm)		500			
Pin Configuration :	(11111)	Pin	Signal	Cable Color		
22		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
		-		•••••		
	<u> </u>					
Application						
Illumination Type	Diffused Illumination					
Applicattion Use		Character recognition on shining surface, lead inspection				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

