


ILLUMINATOR DATA-ID

DLS2-60-50-1-R-24V

Lighting Dimension



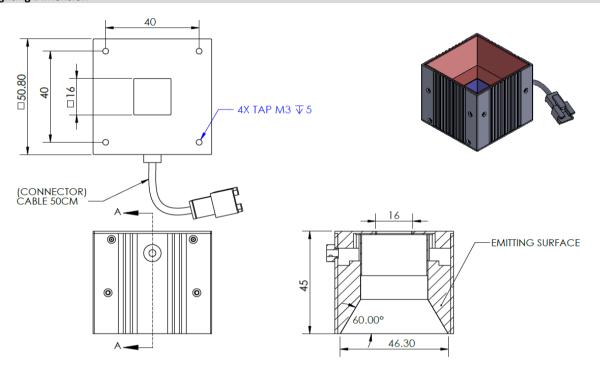

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	120 g
Length / Outer Diameter	50.8 mm
Width / Inner Diameter	16 mm
Thickness / Height	45 mm



DLS2-60-50-1-R-24V

Optical Information						
Part Number			DLR3-60-50-1-R-24V			
LED Color			RED			
Wavelength	(nm)		630			
Intensity (±15%)	(Lux)	3490	3250	2880		
Working Distance	(mm)	15	20	25		
Illumination (number of row)			1			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	46.3				
Active Width / Inner Diameter	(mm)	28.5				
Emission angle	(deg.)	60				
Eye Safety Class (IEC62471)	EXEMPT					
*CHROMATICITY TABLE						
Electrical Information		<u> </u>				
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	120				
Power Consumption	(W)	2.88				
Lighting casing temperature,						
Operating after 60 minutes	°C		58			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)	Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	360				
Max. Trigger Pulse Duration	(msec)	(msec) 10				
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method	Attached to machine part for better heat dissipation					
Intensity Controller Selection	ANG, ST, SD and SDA Series					
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Compostor Time (Default)		ICT CARD COLL				
Connector Type (Default):	(m)		JST SMR-03V 500			
Cable Length out from lighting : Pin Configuration :	(mm)	Pin	Signal	Cable Color		
Till Collingulation .		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
		,		***************************************		
Application						
Illumination Type	Diffused Illumination					
Applicattion Use	Character recognition on shining surface, lead inspection					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

