


ILLUMINATOR DATA-ID

DLS2-60-70-1-G-24V

Lighting Dimension



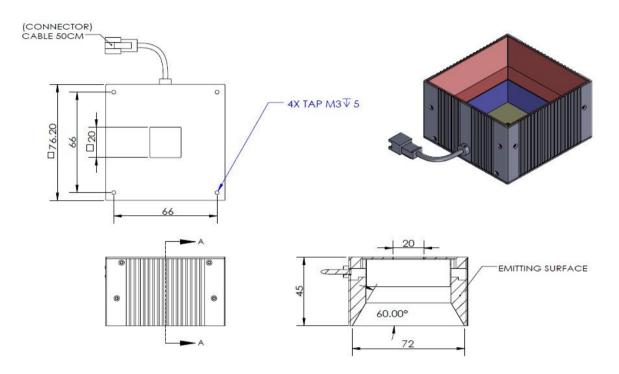

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	220g
Length / Outer Diameter	76.2 mm
Width / Inner Diameter	20 mm
Thickness / Height	45 mm



DLS2-60-70-1-G-24V

Optical Information						
Part Number			DLR3-60-50-1-G-24V			
LED Color			GREEN			
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	TBA	TBA	TBA		
Working Distance	(mm)	7	12	17		
Illumination (number of row)	(111111)	,	1	17		
Illumination (number of row)			<u> </u>			
Active Length / Outer Diameter	(mm)	73.5				
Active Width / Inner Diameter	(mm)	73.5 54				
		60				
Emission angle	(deg.)					
Eye Safety Class (IEC62471)	EXEMPT					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)			24V ± 2%			
Continuous Current	(mA)		180			
Power Consumption	(W)		4.32			
Lighting casing temperature,						
Operating after 60 minutes	°C		49.1			
Strobe Mode Specification						
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage			Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle			
(Constant voltage power supply)	(V)		Recommended at 36VDC			
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)		540			
Max. Trigger Pulse Duration	(msec)	10				
Duty Cycle	0-10%					
Sucy cycle			0 10/0			
	1					
Additional Information						
Additional Conflor Admitted			to the day of the control of the con			
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :	\	Pin	Signal	Cable Color		
coiigurutioii .	 	1	LED +	RED		
	 	2	N.C.			
	 	3	LED -	WHITE		
	 		ננט-	VVIIIE		
		l				
Application						
Application						
Illumination Type			Diffused Illumination			
		Character	Diffused Illumination recognition on shining surface, lead inspection			



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

