


HPD-00-240-1-B-24V

Lighting Dimension



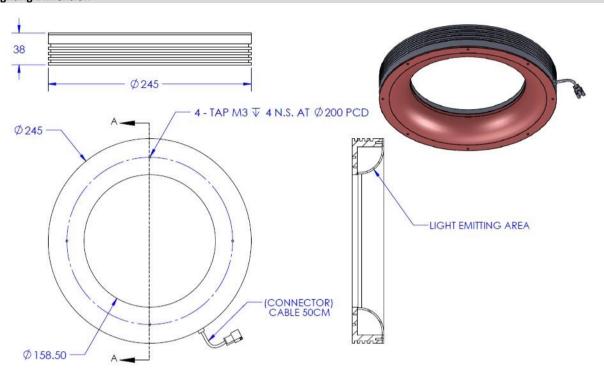

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	1180 g
Length / Outer Diameter	245 mm
Width / Inner Diameter	158.5 mm
Thickness / Height	38 mm



ILLUMINATOR DATA-ID

HPD-00-240-1-B-24V

Optical Information						
Part Number			HPD-00-240-1-B-24V			
LED Color			BLUE			
Wavelength	(nm)		470			
Intensity (±15%)	(Lux)	TBA TBA TBA				
Working Distance	(mm)	90	100	110		
Illumination (number of row)	()	30	1	110		
Illumination Active Area						
Active Length / Outer Diameter	(mm)		225			
Active Width / Inner Diameter						
	(mm)					
Emission angle Eye Safety Class (IEC62471)	(deg.)	(deg.) 0				
Eye safety class (IEC02471)			11			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
	(m ^)					
Continuous Current	(mA)	1190				
Power Consumption	(W)	/) 28.56				
Lighting casing temperature,		1				
Operating after 60 minutes	°C	°C 43.4				
Strobe Mode Specification						
-			V=-			
Pulse Operation		YES				
Max. Lighting Supply Voltage	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
(Constant voltage power supply)	(V)	Pulsing at 24	TVDC to 48VDC, 0-10% Duty Cycle, Recommend	ied at 30VDC		
Pulse Current, (Max. 10msec)	(mA)	3570				
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec)	(msec) 10				
Duty Cycle		0-10%				
Additional Information						
Additional information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection	ANGX, ST, SD and SDA Series					
CE Conformity		YES				
RoHS Compliance	YES					
north compilation			1.50			
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :	(111111)	Pin	Signal	Cable Color		
riii comiguration .	 	Pin 1				
	 		LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
	•					
Application						
Illumination Type		Indirect Illumination				
Applicattion Use		Shining surface and food packaging				
11	Silling surface and food packaging					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

