




Lighting Dimension



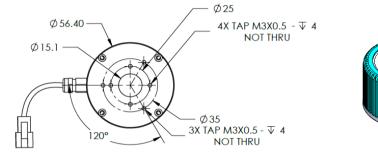



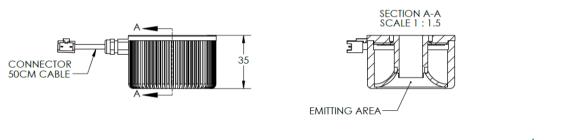

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	100 g
Length / Outer Diameter	56.4 mm
Width / Inner Diameter	15.1 mm
Thickness / Height	35 mm

ILLUMINATOR DATA-ID

HPD2-00-050-1-G-24V


TMS

Optical Information							
Part Number			HPD2-00-050-1-G-24V				
LED Color		GREEN					
Wavelength	(nm)	525					
ntensity (±15%)	(Lux)	35500	21584	6674			
Vorking Distance	(mm)	5	20	63			
lumination (number of row)			1				
lumination Active Area							
Active Length / Outer Diameter	(mm)		44.4				
ctive Width / Inner Diameter	(mm)		17.2				
mission angle	(deg.)		0				
Eye Safety Class (IEC62471)			EXEMPT				
Electrical Information							
	<u> </u>						
ighting Supply Voltage							
constant voltage mode)		24V ± 2%					
Continuous Current	(mA)	120					
ower Consumption	(W)	2.88					
ighting casing temperature,							
Operating after 60 minutes	°C		49.6				
itrobe Mode Specification							
ulse Operation			YES				
Aax. Lighting Supply Voltage	6.3						
Constant voltage power supply)	(∨)	Pulsing at 24	/DC to 48VDC, 0-10% Duty Cycle, Recommended at	36VDC			
ulse Current, (Max. 10msec)							
Constant current power supply)	(mA)		360				
	(2000)						
Nax. Trigger Pulse Duration	(msec)	(msec) 10					
Duty Cycle			0-10%				
Additional Information							
		A.L.	a de la dema de la completa de la co				
Additional Cooling Method		Atta	ached to machine part for better heat dissipation				
ntensity Controller Selection				ANG, ST, SD and SDA Series			
CE Conformity		YES					
RoHS Compliance			YES				
onnection			YES				
connection	(mm)		YES JST SMR-03V				
connection connector Type (Default): able Length out from lighting :	(mm)	Din 1	YES JST SMR-03V 500	Coble Color			
onnection onnector Type (Default): able Length out from lighting :	(mm)	Pin 1	YES JST SMR-03V 500 Signal	Cable Color			
onnection onnector Type (Default): able Length out from lighting :	(mm)	1	YES JST SMR-03V 500 Signal LED +	Cable Color RED			
onnection onnector Type (Default): able Length out from lighting :	(mm)	1 2	YES JST SMR-03V 500 Signal LED + N.C.	RED 			
connection connector Type (Default): able Length out from lighting :	(mm)	1	YES JST SMR-03V 500 Signal LED +				
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	YES JST SMR-03V 500 Signal LED + N.C.	RED 			
Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	YES JST SMR-03V 500 Signal LED + N.C.	RED 			
Connection Connector Type (Default): Cable Length out from lighting :	(mm) (mm) (mm) (mm) (mm) (mm) (mm) (mm)	1 2	YES JST SMR-03V 500 Signal LED + N.C.	RED 			
Connection Connector Type (Default): Cable Length out from lighting : Pin Configuration :		1 2	YES JST SMR-03V 500 Signal LED + N.C.	RED 			
RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting : Pin Configuration :		1 2 3	YES JST SMR-03V 500 Signal LED + N.C.	RED 			



ILLUMINATOR DATA-ID

HPD2-00-050-1-G-24V

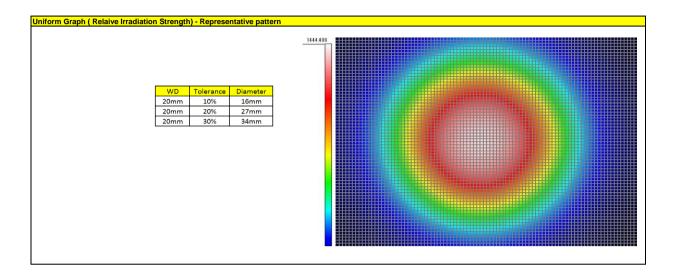



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

