




# ILLUMINATOR DATA-ID

## BHLX3-00-400X400-X-G-24V

### Lighting Dimension

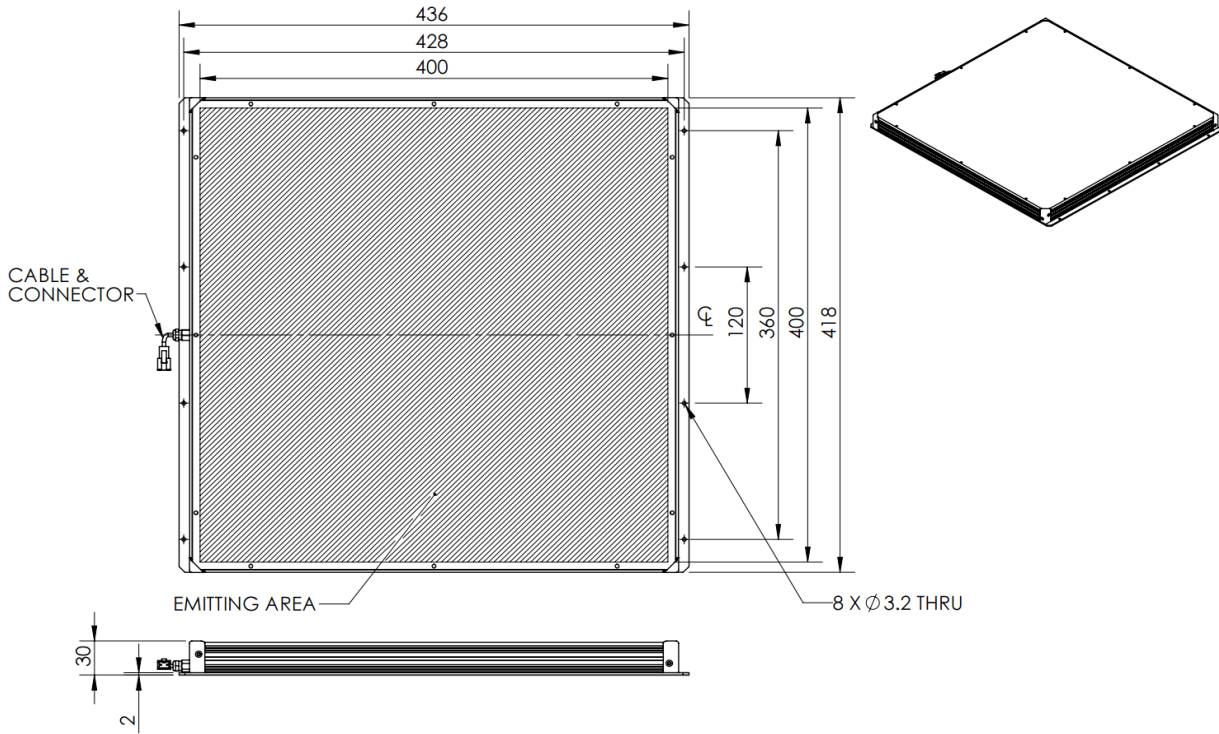


| Mechanical Information    |                              |
|---------------------------|------------------------------|
| Casing Material           | Aluminium                    |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% |
| Weight                    | 2800 g                       |
| Length / Outer Diameter   | 436 mm                       |
| Width / Inner Diameter    | 418 mm                       |
| Thickness / Height        | 30 mm                        |



# ILLUMINATOR DATA-ID

## BHLX3-00-400X400-X-G-24V

| Optical Information  |        |   |        |             |
|--|--------|---|--------|-------------|
| Part Number  |        | BHLX3-00-400X400-X-G-24V  |        |             |
| LED Color  |        | GREEN   |        |             |
| Wavelength   | (nm)   | 525   |        |             |
| Intensity (±15%)   | (Lux)  | TBA   | TBA    | TBA         |
| Working Distance   | (mm)   | 10  | 20     | 30          |
| Illumination (number of row)   |        | X   |        |             |
| Illumination Active Area   |        |   |        |             |
| Active Length / Outer Diameter   | (mm)   | 400   |        |             |
| Active Width / Inner Diameter  | (mm)   | 400   |        |             |
| Emission angle   | (deg.) | 0   |        |             |
| Eye Safety Class ( IEC62471 )  |        | EXEMPT  |        |             |
| Electrical Information   |        |   |        |             |
| Lighting Supply Voltage<br>(constant voltage mode)                                   |        | 24V ± 2%  |        |             |
| Continuous Current   | (mA)   | 4500  |        |             |
| Power Consumption  | (W)    | 108   |        |             |
| Lighting casing temperature,<br>Operating after 60 minutes                           | °C     | TBA   |        |             |
| Strobe Mode Specification  |        |   |        |             |
| Pulse Operation  |        | YES   |        |             |
| Max. Lighting Supply Voltage<br>(Constant voltage power supply)                      | (V)    | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle<br>Recommended at 36VDC |        |             |
| Pulse Current, (Max. 10msec)<br>(Constant current power supply)                      | (mA)   | 13500   |        |             |
| Max. Trigger Pulse Duration  | (msec) | 10  |        |             |
| Duty Cycle   |        | 0-10%   |        |             |
| Additional Information   |        |   |        |             |
| Additional Cooling Method  |        | Attached to machine part for better heat dissipation                |        |             |
| Intensity Controller Selection   |        | ANGX, ST and SD Series  |        |             |
| CE Conformity  |        | YES   |        |             |
| RoHS Compliance  |        | YES   |        |             |
| Connection   |        |   |        |             |
| Connector Type (Default):  |        | JST SMR-03V   |        |             |
| Cable Length out from lighting :   | (mm)   | 500   |        |             |
| Pin Configuration :  |        | Pin   | Signal | Cable Color |
|  |        | 1   | LED +  | RED         |
|  |        | 2   | N.C.   | ---         |
|  |        | 3   | LED -  | WHITE       |
|  |        |   |        |             |
| Application  |        |   |        |             |
| Illumination Type  |        | Backlight Illumination  |        |             |
| Applicattion Use   |        | Lead frame inspection, shape recognition, size measurement          |        |             |



**VISION CONSULTANCY**  
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from  
[www.machine-vision-shop.com](http://www.machine-vision-shop.com)

If you have any questions, you need help composing the  
right package for your application or do you want to order?

Feel free to contact us via e-mail at [sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl) or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptvoets



**VISION CONSULTANCY**

Robert Schumandomein 2  
6229 ES Maastricht  
The Netherlands

+31 (0) 438 522 651

[sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl)  
[www.machine-vision-shop.com](http://www.machine-vision-shop.com)

Scan me to visit  
[machine-vision-shop](http://machine-vision-shop.com)

