


## **ILLUMINATOR DATA-ID**

### LSQ-00-050-2-G-24V

### **Lighting Dimension**

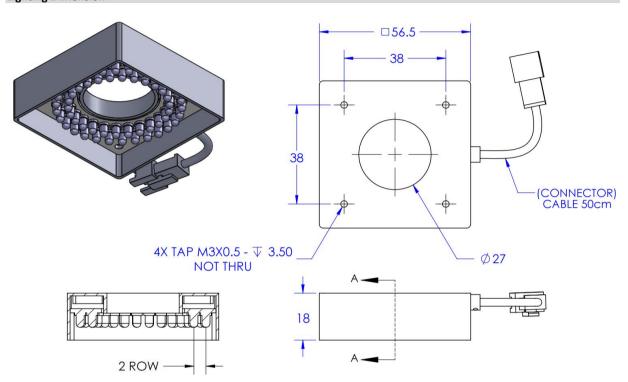

ROHS CE

Mechanical Information				
Casing Material	Aluminium			
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%			
Weight	80 g			
Length / Outer Diameter	56.5 mm			
Width / Inner Diameter	27 mm			
Thickness / Height	18 mm			



# **ILLUMINATOR DATA-ID**

## LSQ-00-050-2-G-24V

Optical Information						
Part Number		LSQ-00-050-2-G-24V				
LED Color	i i		GREEN			
Wavelength	(nm)	GREEN 525				
Intensity (±15%)	(Lux)	10800 9980 9150				
Working Distance	(mm)	63	68	73		
Illumination (number of row)	()	03	2	,,,		
Illumination Active Area	1		-			
Active Length / Outer Diameter	(mm)		54.6			
Active Width / Inner Diameter	(mm)	29.5				
Emission angle	(deg.)	0				
Eye Safety Class ( IEC62471 )	(ucg.)	EXEMPT				
-,,						
Electrical Information						
Lighting Supply Voltage	l T					
(constant voltage mode)			24V ± 2%			
Continuous Current	(mA)	120				
Power Consumption	(W)	2.88				
Lighting casing temperature,		**				
Operating after 60 minutes	°C	55.9				
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	0.0					
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	360				
Max. Trigger Pulse Duration	(msec)		10			
Duty Cycle	(	0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type		Direct Illumination				
		Substrate inspection, label inspection, flat surface, fiducially recognition.				
Applicattion Use		Substitute inspection, label inspection, flat surface, fluorially recognition.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

