


LBRQ-00-120-3-G-24V

Lighting Dimension



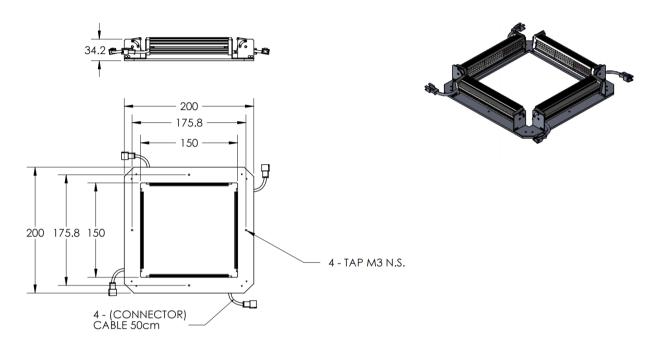

| Mechanical Information | |
|---------------------------|--------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight | 595 g |
| Length / Outer Diameter | 200 mm |
| Width / Inner Diameter | 150 mm |
| Thickness / Height | 34.2 mm |



LBRQ-00-120-3-G-24V

| Optical Information | | | | | | |
|----------------------------------|--------|---|---|-------------|--|--|
| Part Number | | LBRQ-00-120-3-G-24V | | | | |
| LED Color | | | GREEN | | | |
| Wavelength | (nm) | 525 | | | | |
| Intensity (±15%) | (Lux) | TBA | TBA | ТВА | | |
| Working Distance | (mm) | 223 | 236 | 247 | | |
| Illumination (number of row) | (, | | 3 | = | | |
| Illumination Active Area | | | | | | |
| Active Length / Outer Diameter | (mm) | 200 | | | | |
| Active Width / Inner Diameter | (mm) | | 150 | | | |
| Emission angle | (deg.) | 0 | | | | |
| Eye Safety Class (IEC62471) | (deg.) | EXEMPT | | | | |
| Eye surety class (1ECC2471) | | | EALWI I | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage | | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | | |
| Continuous Current | (mA) | 24V ± 2% 504 | | | | |
| Power Consumption | (W) | | 12.1 | | | |
| Lighting casing temperature, | (**) | 12.1 | | | | |
| Operating after 60 minutes | °c | TBA | | | | |
| | | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | | YES | | | |
| Max. Lighting Supply Voltage | (V) | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC | | | | |
| (Constant voltage power supply) | (*) | ruising at 24 | VDC to 48VDC, 0-10% Duty Cycle, Necommend | ed at 30VDC | | |
| Pulse Current, (Max. 10msec) | (1) | | | | | |
| (Constant current power supply) | (mA) | 1512 | | | | |
| Max. Trigger Pulse Duration | (msec) | | 10 | | | |
| Duty Cycle | (msee) | 0-10% | | | | |
| Additional Information | | | | | | |
| Additional information | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANG, ST, SD and SDA Series | | | | |
| CE Conformity | | YES | | | | |
| RoHS Compliance | | YES | | | | |
| | | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | , . | JST SMR-03V | | | | |
| Cable Length out from lighting : | (mm) | | 500 | | | |
| Pin Configuration : | | Pin | Signal | Cable Color | | |
| | | 1 | LED + | RED | | |
| | | 2 | N.C. | | | |
| | | 3 | LED - | WHITE | | |
| | | | | | | |
| | | | | | | |
| Application | | | | | | |
| | | Digast Illustration | | | | |
| Illumination Type | | Direct Illumination | | | | |
| Applicattion Use | | General illumination, label inspection, character inspection, code recognition. | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

