


LBRQ-00-200-3-IR850-24V

Lighting Dimension



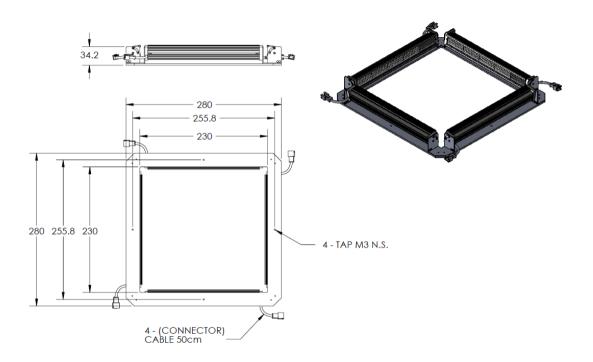

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	900
Length / Outer Diameter	280
Width / Inner Diameter	230
Thickness / Height	34.2



LBRQ-00-200-3-IR850-24V

Optical Information						
Part Number		LBRQ-00-200-3-IR850-24V				
LED Color			IR			
Wavelength	(nm)		850			
Intensity (±15%)	(Lux)		NA			
Working Distance	(mm)					
Illumination (number of row)	, ,	3				
Illumination Active Area						
Active Length / Outer Diameter	(mm)		280			
Active Width / Inner Diameter	(mm)	230				
Emission angle	(deg.)		0			
Eye Safety Class (IEC62471)	(008.7	EXEMPT				
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)		900			
Power Consumption	(W)					
Lighting casing temperature,	(**)	(W) 21.6				
Operating after 60 minutes	°C		TDA			
Operating after 60 minutes	C	°C TBA				
Strobe Mode Specification						
-						
Pulse Operation			YES			
Max. Lighting Supply Voltage	0.0	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)		Recommended at 36VDC			
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	2700				
Max. Trigger Pulse Duration	(mcoc)	10				
Duty Cycle	(IIISec)	(msec) 10				
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Constant Total (D. C. 11)		INTERNAL COLUMN				
Connector Type (Default):	, ,	JST SMR-03V				
Cable Length out from lighting :	(mm)		500	A.I. c.		
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type	IR Illumination					
Applicattion Use	General illumination, label inspection, character illumination, code recognition					
	General illumination, label inspection, character illumination, code recognition					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

