


ILLUMINATOR DATA-ID

LBRX-00-080-6-G-24V



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	100 g
Length / Outer Diameter	92 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	22 mm

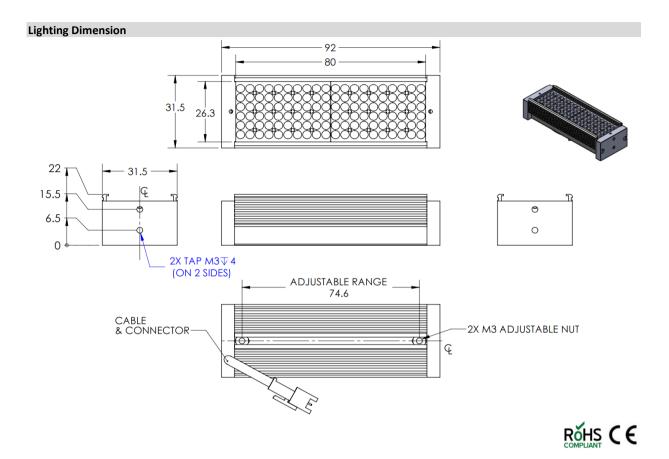

LBRX-00-080-6-G-24V

Optical Information						
Part Number		LBRX-00-080-6-G-24V				
LED Color			GREEN			
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	8660	5860	4700		
Working Distance	(mm)	100	130	150		
Illumination (number of row)	()		6	===		
Illumination Active Area						
Active Length / Outer Diameter	(mm)	80				
Active Width / Inner Diameter	(mm)		26.3			
Emission angle	(deg.)	20.3				
Eye Safety Class (IEC62471)	(ueg.)	EXEMPT				
Eye surety class (1ECO2471)			EALWI I			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	24V ± 276 144				
Power Consumption	(W)	144 3.46				
Lighting casing temperature,	(**)	3.40				
Operating after 60 minutes	°C	52.1				
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
(Constant voltage power supply)	(*)	ruising at 24	VDC to 48VDC, 0-10% Duty Cycle, Necommend	ed at 30VDC		
Pulse Current, (Max. 10msec)		400				
(Constant current power supply)	(mA)	432				
Max. Trigger Pulse Duration	(msec)		10			
Duty Cycle	(msee)	0-10%				
Additional Information						
Additional information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
Connector Type (Default):	, .	JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Tune		Direct Illustriantian				
Illumination Type		Direct Illumination				
Applicattion Use		General illumination, label inspection, character inspection, code recognition.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

