


ILLUMINATOR DATA-ID

LSW-00-070-3-G-24V

Lighting Dimension



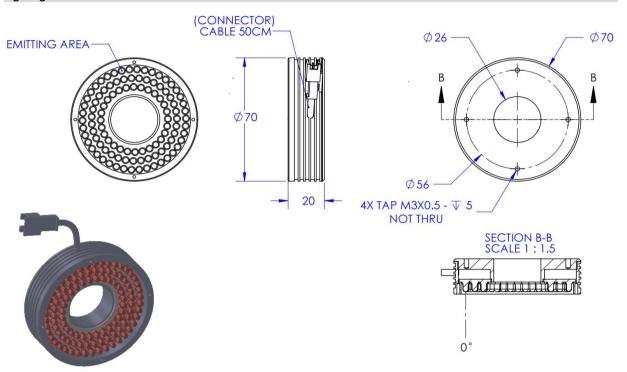

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	120 g
Length / Outer Diameter	70 mm
Width / Inner Diameter	26 mm
Thickness / Height	20 mm



LSW-00-070-3-G-24V

Optical Information							
Part Number			LSW-00-070-3-G-24V				
LED Color			GREEN				
Wavelength	(nm)	525					
Intensity (±15%)	(Lux)	20640	18000	15600			
Working Distance	(mm)	95	105	115			
Illumination (number of row)	(111111)	95	3	113			
			3				
Illumination Active Area	, ,						
Active Length / Outer Diameter	(mm)	62					
Active Width / Inner Diameter	(mm)	28.2					
Emission angle	(deg.)		0				
Eye Safety Class (IEC62471)	EXEMPT						
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)			24V ± 2%				
Continuous Current	(mA)	225					
Power Consumption	(W)	5.4					
Lighting casing temperature,	(44)	5.4					
			C2.4				
Operating after 60 minutes	٠,٠	°C 63.1					
Strobe Mode Specification							
Pulse Operation		YES					
Max. Lighting Supply Voltage	(V)	Pulsing at 24VIDC to 49VIDC 0.409/ Duty Cycle. Percempended at 26VIDC					
(Constant voltage power supply)	(v)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC					
Pulse Current, (Max. 10msec)							
(Constant current power supply)	(mA)	675					
Max. Trigger Pulse Duration	(msec)	10					
Duty Cycle	(III3CC)	0.10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, ST, SD and SDA Series					
CE Conformity	YES						
RoHS Compliance	YES						
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting :	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
com _B aration .		1	LED +	RED			
	-			RED			
	 	2	N.C.				
		3	LED -	WHITE			
Application							
Illumination Type		Direct Illumination					
Applicattion Use							
IADDIICALLIUII USE	Substrate inspection, label inspection, flat surface, fiducially recognition.						



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

