


ILLUMINATOR DATA-ID

LSW-15-090-4-R-24V

Lighting Dimension



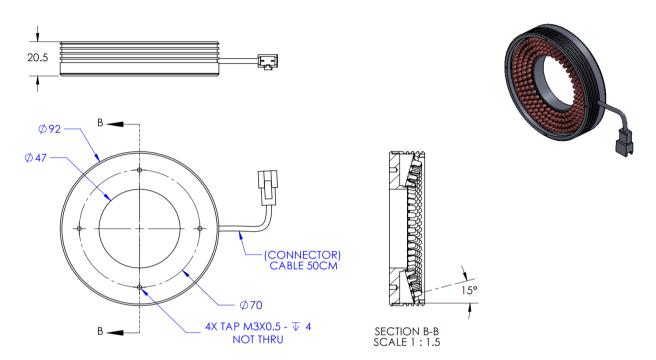

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	180 g
Length / Outer Diameter	92 mm
Width / Inner Diameter	47 mm
Thickness / Height	20.5 mm



LSW-15-090-4-R-24V

LED Color Wavelength (nm) Intensity (±15%) (Lux) 40900 Working Distance (mm) 110 Illumination (number of row) Illumination Active Area Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class (iEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) (constant voltage mode) Continuous Current (mA) Power Consumption (W) Lighting casing temperature, Operating after 60 minutes °C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant voltage power supply) Max. Trigger Pulse Duration (msec) Duty Cycle Additional Information Additional Information Additional Cooling Method Attached to machi	110	Optical Information							
IED Color Wavelength (nm) (nm) (ntensity (±15%) (Lux) 40900 (L	RED G30 G30	Part Number			LSW-15-090-4-R-24V				
Wavelength (nm) Intensity (±15%) (Lux) 40900 Working Distance (nm) 110 Illumination (number of row) Ill	630								
Intensity (±15%) (Lux) 40900 Working Distance (mm) 110 Illumination (number of row) Illumination (number of row) Illumination Active Area Active Length Outer Diameter (mm) Active Width / Uner Diameter (mm) Emission angle (deg.) Eye Safety Class (IEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) Constant voltage mode) (W) Lighting casing temperature, Operating after 60 minutes	40900 36000 31300		(nm)						
Working Distance (mm) 110 Illumination (number of row) Illumination (number of row) Illumination (number of row) Illumination Active Area Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class (IEC62471)	110 120 130			40900					
Illumination (number of row)	## ## ## ## ## ## ## ## ## ## ## ## ##								
Illumination Active Area Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class (IEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current (mA) Power Consumption (W) Lighting casing temperature, Operating after 60 minutes °C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage produce) (Constant voltage produce) (Constant voltage power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Information Additional Cooling Method Intensity Controler Selection CE Conformity RoHS Compiliance Connection Connection Connection Connection Pin Online Connection Pin Online Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configu	### ### ### ### ### ### ### ### ### ##		(,						
Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class (IEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current (mA) Dewer Consumption (W) Lighting casing temperature, Operating after 60 minutes °C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Max. Trigger Pulse Duration (msec) Duty Cycle Additional Information Additional Cooling Method (msec) Intensity Controller Selection ANG. CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Con	49.4 15 EXEMPT 24V ± 2% 330 7.92 65.7 Fulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C								
Active Width / Inner Diameter (mm) Emission angle (deg.) Eye Safety Class (IEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current (mA) Power Consumption (W) Lighting casing temperature, Operating after 60 minutes °C Strobe Mode Specification Pulse Operation (Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Operation (Max. Jonsec) (mA) Constant voltage power supply) (mA) Max. Trigger Pulse Duration (msec) Duty Cycle Additional Information Additional Cooling Method (msec) Duty Cycle Additional Cooling Method (msec) Connection (Connection Type (Default): Connection (Connection Type (Default): Connection (Connection Type (Default): Cable Length out from lighting : (mm) Pin Onfiguration: Pin Configuration: Pin Configuration:	49.4 15 EXEMPT 24V ± 2% 330 7.92 65.7 Fulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C		(mm)		85				
Emission angle Eye Safety Class (IEC62471) Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current Power Consumption Lighting casing temperature, Operating after 60 minutes *C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Max. Trigger Pulse Duration Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin Configuration: Pin	15 EXEMPT 24V ± 2% 330 7.92 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES 15T SMR-03V SOO Pin Signal Cable Color 1 LED + RED 2 N.C								
Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current Power Consumption Lighting casing temperature, Operating after 60 minutes Continuous Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage mode) (V) Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant voltage power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin 1 1 2	### EXEMPT 24V ± 2% 330 7.92								
Electrical Information Lighting Supply Voltage (constant voltage mode) Continuous Current Power Consumption (W) Lighting casing temperature, Operating after 60 minutes *C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Offiguration: Pin Offiguration: Pin Default Selection Pin Offiguration: Pin Offiguration: Pin Offiguration: Pin Default Selection Pin Offiguration: Pin Default Selection Pin Default S	24V ± 2% 330 7.92 65.7 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C		` ` ` ` `						
Lighting Supply Voltage (constant voltage mode) Continuous Current (mA) Power Consumption (W) Lighting casing temperature, Operating after 60 minutes **C **C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin 1 1 2	330 7.92 65.7 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED+ RED 2 N.C								
Constant voltage mode	330 7.92 65.7 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED+ RED 2 N.C	Electrical Information							
Constant voltage mode	330 7.92 65.7 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED+ RED 2 N.C	Lighting Supply Voltage							
Continuous Current (mA) Power Consumption (W) Lighting casing temperature, Operating after 60 minutes *C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration (msec) Duty Cycle Additional Information Additional Cooling Method Attached to machinate intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configuration	330 7.92 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C				24V ± 2%				
Power Consumption (W) Lighting casing temperature, Operating after 60 minutes *C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin 1 1 1 1 1 1 1 1 1 1 1 1 1	7.92 65.7 YES Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 1 2 N.C	Continuous Current	(mA)						
Lighting casing temperature, Operating after 60 minutes Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Max. Trigger Pulse Duration Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Pin Configuration: Pin Configuration: Pin 1	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C								
Operating after 60 minutes *C Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Attached to machi Intensity Controller Selection ANG, CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configurati	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C		,:·/		1.32				
Strobe Mode Specification Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Pin Configur	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C		°C		65.7				
Pulse Operation Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Attached to machi Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin 1 1 1	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 1ST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C								
Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configuration: (msec) Pulsing at 24VDC to 48VDC, Pulsing at 24VD	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 15T SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C	Strobe Mode Specification							
Max. Lighting Supply Voltage (Constant voltage power supply) Pulse Current, (Max. 10msec) (Constant current power supply) Max. Trigger Pulse Duration Duty Cycle Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (W) Pulsing at 24VDC to 48VDC, (mA) (msec) Duty Cycle Attached to machi ANG, CE Conformity RoHS Compliance Pin Pin 1 1	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC 990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES 15T SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C	Pulse Operation			YES				
Additional Information Additional Information Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: (mA) (mA) (mA) (mA) (mA) (msec) (msec) Attached to machi ANG, CE Conformity RoHS Compliance (mm) Pin 1 1 2	990 10 0-10% Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C	Max. Lighting Supply Voltage	0.0						
Constant current power supply (IIIA)	10	(Constant voltage power supply)	(V)	Pulsing at 24	IVDC to 48VDC, 0-10% Duty Cycle, Recommended	at 36VDC			
Constant current power supply (IIIA)	10	Pulse Current, (Max. 10msec)							
Max. Trigger Pulse Duration (msec) Duty Cycle Additional Information Additional Cooling Method Attached to machi Intensity Controller Selection ANG, CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin Configuration: Description Pin 1 1 2	O-10%		(mA)		990				
Additional Information Additional Cooling Method Attached to machi Intensity Controller Selection ANG, CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Pin 1 2	O-10%		(msec)		10				
Additional Information Additional Cooling Method Attached to machi Intensity Controller Selection ANG, CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Pin 1 1 2	Attached to machine part for better heat dissipation ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C		, , , , , ,						
Additional Cooling Method Attached to machinensity Controller Selection ANG, CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Pin 1 2	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C								
Intensity Controller Selection ANG, CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C	Additional Information							
Intensity Controller Selection ANG, CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Pin Signal Cable Color 1 LED + RED 2 N.C	Additional Cooling Method		At	tached to machine part for better heat dissipation	ı			
CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin 1 1 2 1	ST SMR-03V S00 Cable Color 1 LED + RED 2 N.C.								
RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: 1 2	JST SMR-03V				YES				
Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin 1 2					YES				
Connector Type (Default): Cable Length out from lighting: (mm) Pin Configuration: Pin 1 2									
Cable Length out from lighting : (mm) Pin Configuration : Pin 1 1 2		Connection							
Pin Configuration: Pin 1 2	Pin Signal Cable Color 1 LED + RED 2 N.C.								
1 2	1 LED + RED 2 N.C		(mm)		500				
2	2 N.C	Pin Configuration :							
3	3 LED- WHITE								
				3	LED -	WHITE			
Application		Application							
Illumination Type Direct I	Direct Illumination	Illumination Type							
	Substrate inspection, label inspection, flat surface, fiducially recognition.	Applicattion Use							
Application Illumination Type Direct I	Direct Illumination	Connector Type (Default): Cable Length out from lighting: Pin Configuration: Application	(mm)	1 2	500 Signal LED+ N.C. LED-	RED 			



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

