
ILLUMINATOR DATA-ID

CAS2-00-070-X-B-24V

Lighting Dimension

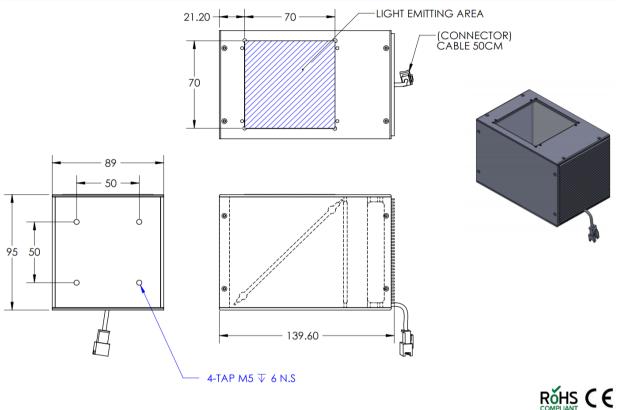

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	740 g
Length / Outer Diameter	139.6 mm
Width / Inner Diameter	89 mm
Thickness / Height	95 mm

ILLUMINATOR DATA-ID

CAS2-00-070-X-B-24V

Optical Information							
Part Number		CAS2-00-070-X-B-24V					
LED Color		BLUE					
Wavelength	(nm)	470					
Intensity (±15%)	(Lux)	7700	6230	5110			
Working Distance	(mm)	40	50	60			
Illumination (number of row)			х				
Illumination Active Area							
Active Length / Outer Diameter	(mm)	70					
Active Width / Inner Diameter	(mm)	70					
Emission angle	(deg.)	0					
Eye Safety Class (IEC62471)		l					
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)		24V ± 2%					
Continuous Current	(mA)	24V ± 2% 560					
Power Consumption	(MA) (W)	13.44					
Lighting casing temperature,	(**)	13.44					
Operating after 60 minutes	°C	47.5					
Operating arter of minutes	L L		47.5				
Strobe Mode Specification							
Dulas Ossentias			VEC				
Pulse Operation		YES					
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC					
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	1680					
Max. Trigger Pulse Duration	(msec)						
Duty Cycle		0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, ST, SD and SDA Series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting :	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	N.C.				
		3	LED -	WHITE			
		-	•				
Application							
Illumination Type		Coaxial Illumination					
Applicattion Use		Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.					
The second		contect inspection and diginiterit, watch, metal surface, nini, eep and glass, patterit off reb.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

